

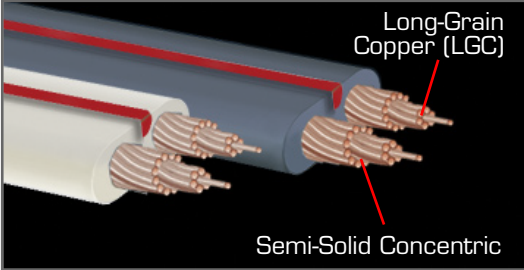


# X2 SPEAKER CABLES



### SPEAKER CABLE

#### Semi-Solid Concentric Packing


Overall: 2 x 14 AWG (1.94 mm<sup>2</sup>)

2 x (19 X 27 AWG) **Long-Grain Copper (LGC)**

Semi-Solid Concentric Packing

Dark Gray or Off-White PVC Jacket

## TYPICAL SPEAKER CABLE

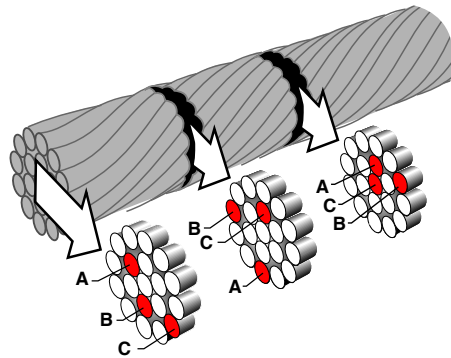


### STRANDS CHANGE POSITION


In a conventional cable, distortion caused by electrical and magnetic interaction are compounded as each strand changes position within the bundle.

Normal Multi-Strand

Tough Pitch Copper (TPC)

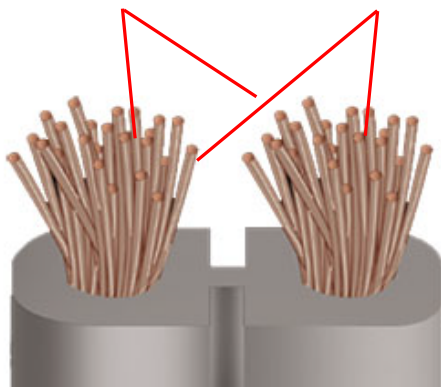

## X2

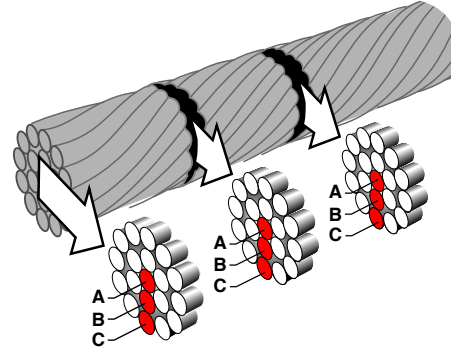

### STRANDS DO NOT CHANGE POSITION

In a Semi-Solid concentric packing cable, strands within the smaller, tighter concentric bundle do not change position, significantly reducing distortion.

Semi-Solid Concentric

Long-Grain Copper

