



COMING 2018

SÉURA OUTDOOR TVS

Storm Ultra Bright

For sunny locations, Séura Storm Ultra Bright™ Outdoor TVs provide industry-leading image quality and 1000-nit brightness for a remarkable picture in any lighting condition, including full-sun viewing.

IDEAL SPACE	DISPLAY SIZES	BACKLIGHT BRIGHTNESS	TEMPERATURE RANGE
Decks Patios Hot Tubs	49 inch 4K UHD 55 inch 4K UHD 65 inch 4K UHD 86 inch 4K UHD	950-1000 cd/m2	-24°F to 122°F



FULLY WEATHERPROOF

Séura Outdoor TVs are carefully designed and tested to thrive outside year-round, no matter how brutal the climate or conditions.



SLEEK AND CONTEMPORARY


Séura continues to lead the outdoor category in elegance, with sleek mirrored side panels that incorporate the TV into any designed outdoor environment combined with our signature svelte technology.



ADAPTIVE PICTURE TECHNOLOGY™

This proprietary and patent-pending technology continuously adjusts display backlight and contrast settings to present optimal video quality in changing lighting conditions with no input from the user.

CONNECTIONS

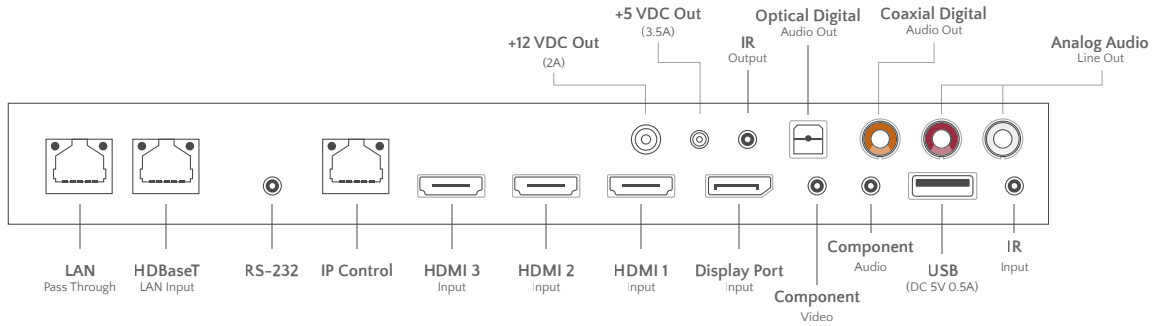

49 INCH 4K UHD
Model: STM3-49-U

55 INCH 4K UHD
Model: STM3-55-U

65 INCH 4K UHD
Model: STM3-65-U

86 INCH 4K UHD
Model: STM3-86-U

	49 INCH 4K UHD Model: STM3-49-U	55 INCH 4K UHD Model: STM3-55-U	65 INCH 4K UHD Model: STM3-65-U	86 INCH 4K UHD Model: STM3-86-U	
GENERAL	OPERATING TEMPERATURE RANGE		-24°F to 122°F*		
	OPERATING HUMIDITY RANGE		20–80% RH, non-condensing		
	WATERPROOF RATING		IP54 Minimum Rating†		
	ISOTROPIC PREVENTION		High TNi panels help to prevent screen blackout		
VIDEO	DISPLAY RESOLUTION		3840 x 2160		
	DISPLAY BRIGHTNESS		1000 cd/m2	950 cd/m2	
	ASPECT RATIO		16:9	16:9	
	CONTRAST RATIO		Typical 1100:1	Typical 1000:1	
	TUNER		N/A	N/A	
	RESPONSE TIME		8 ms	8 ms	
	VIEWING ANGLE		178° Horizontal/Vertical	178° Horizontal/Vertical	
	POWER CONSUMPTION, DISPLAY		Standby: 3.5W Heating: 200W Normal: 160W Max	Standby: 3.5W Heating: 200W Normal: 175W Max	Standby: 3.5W Heating: 200W Normal: 200W Max
	POWER CONSUMPTION, AC OUTLET		Max 200W		
	DC OUTPUT		Max 41.5W (12V 2A, 5V 3.5A)		
INTEGRATION	HDMI		3		
	HDBaseT™		1 Port with LAN Out		
	COMPONENT YPbPr		1		
	DISPLAY PORT		1		
	LAN PORT		1 (IP Control)		
	RS-232C		1		
	IR INPUT		1		
	IR OUTPUT		1		
	Service Port		1 (USB Type)		
	DC OUT		12V-Max 2A, 5V-Max 3.5A		
AC OUT		100-240V~, 50/60Hz, Max 200W Outlet			
AUDIO	AUDIO: COMPONENT AUDIO INPUT		1		
	AUDIO: ANALOG LINE OUT		1		
	AUDIO: OPTICAL DIGITAL OUT		1		
	AUDIO: COAXIAL DIGITAL OUT		1		
	INTERNAL SPEAKERS		N/A		
INSTALLATION	PRODUCT DIMENSIONS		44.6" w x 26.1" h	50.0" w x 29.1" h	
	PRODUCT DEPTH		3.7"	3.7"	
	PRODUCT WEIGHT		61.1 lbs.	70.5 lbs.	
	COMPARTMENT DIMENSIONS		11" w x 8" h x 1.5" d	11" w x 8" h x 1.5" d	
	VESA PATTERN		400 x 400mm		
OTHER	CERTIFICATIONS AND COMPLIANCE		FCC, MET		
	WARRANTY		Séura warrants Outdoor Displays with respect to Séura's labor, structure, assembly, display including remote, and power supply for two (2) years.		
	REMOTE		Séura Water Resistant IR Remote Control		

* Installation in sunlight reduces the maximum permitted air temperature.

† IP Rating is an international standard that specifies the degree of protection against dust and water ingress. Séura Outdoor TVs are IP rated and designed to protect against rain, snow, ice, dust, and other outdoor elements.