



CMP250711
200 series fully automatic espresso machine
Glass front in Gaggenau Metallic
Width 24" (60 cm)
Controls on top

Handleless door/soft-closing door system
Continuous flow heater means no waiting time and constant brewing temperature
Aroma brewing technology for a full aroma
Single portion cleaning
TFT touch display
One-touch operation
Personalization function
7 light settings
Electronic fill level control for milk, water and coffee to ensure a perfect result

Type of beverage

Ristretto / 2 x Ristretto.
 Espresso / 2 x Espresso.
 Espresso Macchiato / 2 x Espresso Macchiato.
 Coffee / 2 x Coffee.
 Americano / 2 x Americano.
 Caffè Latte / 2 x Caffè Latte.
 Latte Macchiato / 2 x Latte Macchiato.
 Cappuccino / 2 x Cappuccino.
 Flat White / 2 x Flat White.
 Milk froth / 2 x Milk froth.
 Warm milk / 2 x Warm milk.
 Hot water / 2 x Hot water.

Operation

Door with soft-closing system.
 Rotary knob and TFT touch display operation.
 Clear text display in 25 languages.
 Personalization function, up to 8 beverages can be personalized and memorized.
 4 beverage size settings from small to extra large; can be individually adjusted to match the size of the cup.
 8 coffee strength levels from very mild to extra strong.
 3 coffee and hot water temperature levels.
 4 coffee-milk ratio levels.
 Adjustable grinding level.
 Height-adjustable coffee dispenser 2 3/4" - 5 7/8".
 Easy access to water tank, milk and coffee bean container behind the door.

Features

Non-wearing grinding unit with ceramic discs.
 Separate drawer for second ground coffee type.
 Water pump with 275 psi (19 bar) pressure.
 Double grinding and brewing cycles for two beverages.
 Beverage dispenser with integrated milk system.
 Insulated stainless steel milk container for up to 17 oz. (0.5 litres).
 Integrated LED lighting.
 Removable bean container with aroma protecting lid for 1.1 lbs., allows for an effortless exchange of different types of coffee beans.
 Automatic adjustment of ground coffee quantity.
 Removable 2.5 quarts (2.4 liter) (2.4 litre) water tank.
 Electronic water filter exchange indicator.
 Electronic fill level control for drip tray and container for coffee residue.

Safety

Child lock.

Product Features

Frothing nozzle
 No
Hot water spout
 No
Adjustable programs
 Brewing temperature, Coffee powder quantity per cup, Grinding factor, Water hardness, Water quantity per serving
Standby function
 Yes
Pump pressure (bar)
 19
Simultaneous preparation of 2 cups
 Yes
Included accessories
 1 x assembly screws, 1 x scoop, 1 x test strip, 1 x milk container (insulated), 1 x connection hose for milk frother, 1 x milk pipe
Optional accessories

Consumption and connection features

Product group
 Built-in coffee machine
Brand
 Gaggenau
Product name / series name
 SKU
 CMP250711
UPC code
 825225936985
Variant color
 Stainless steel
Typology
 Fully automatic
Watts (W)
 1600
Current (A)
 10
Volts (V)
 120
Frequency (Hz)
 50/60
Approval certificates
 UL
Power Cord Length
 39"
Plug type
 Gardy plug w/ earthing
Recommened height for installation (in)
 17 11/16"
Overall appliance dimensions (HxWxD) (in)
 17 15/16" x 23 1/4" x 16 3/4"
Dimensions of the packed product (in)
Net weight (lbs)
 54
Gross weight (lbs)
 65
Capacity water container (l)
 2.4
Dimensions of the pallet (in)
2019-02-08
 Page 1

Cleaning

Fully automatic rinse program when machine is turned on/off.
 Automatic steam cleaning of the milk system after every beverage.
 Automatic cleaning and descaling program.
 Emptying program to prepare the appliance for holiday or transportation.
 Removable brewing unit.
 Coffee residue container and drip tray dishwasher-safe.
 Beverage dispenser dishwasher-safe.


Planning notes

Ideal installation height 3.1 ft - 4.8 ft. (top edge of bottom niche).
 Necessary lateral gap between appliance front and furniture panel of min. 3/16".
 The door panel surface of the appliance extends 13/16" from the furniture cavity.
 When installing in a corner a side clearance is required.
 Door opening angle appr. 110° (delivery status) - mounting distance to the wall has to be at least 13 3/4".
 Door opening angle appr. 155° - mounting distance to the wall has to be at least 25 9/16".
 Door opening angle appr. 92° - mounting distance to the wall has to be at least 3 15/16" (spare part No. 00636455).
 Installation directly above WS461 (5 3/8" tall) high warming drawer in 23 1/4" standard cut-out niche.
 Special accessories (order as spare parts):
 Part No. 12008246 Water filter
 Part No. 00311820 Descaling tablets
 Part No. 00311823 Cleaning tablets
 Part No. 00636455 Door hinge restrictor (92° opening angle)
 Part No. 11015223 Bean container with lid

Rating


Total rating 1.6 kW.

left corner installation

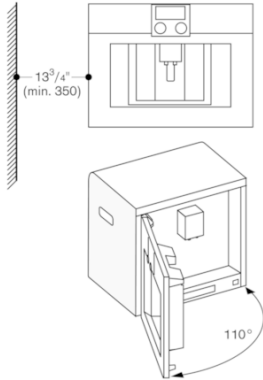

If using the 92° door hinge restrictor (spare part no. 00636455), the minimum distance to the wall is only 3 15/16" (100 mm).

Corner installation left

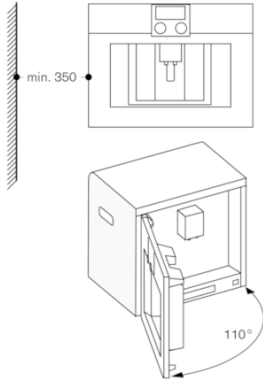

When using the 92° door hinge restrictor (Spare Part No. 00636455), the minimum distance to the wall is only 100 mm.

