













ASSEMBLY INSTRUCTION

Item#: 1618-75007-DKW Trestle Dining Table Base
1618-75008-DKW Trestle Dining Table Top

** Please make sure you have all parts indicated below prior to assembly.

NO.	HARDWARE LIST		Q'TY
A		ALLEN WRENCH	1
B		BOLT 5/16*65mm	14
C		LOCK WASHER 5/8"	16
D		FLAT WASHER 5/8"	16
E		BOLT 5/16*35mm	2
F		THREADED ROD	2
G		BOLT 3/8*50mm	2
H		LEVELER WRENCH	1
I		NUT 17mm	2
J		RUBBER GASKET	6
K		LOCK WASHER 3/8"	4
L		FLAT WASHER 3/8*25mm	6

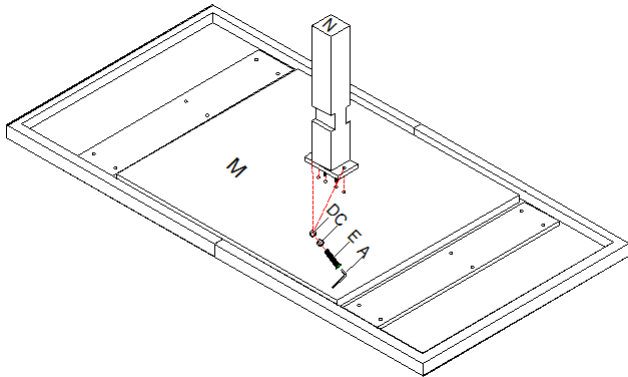
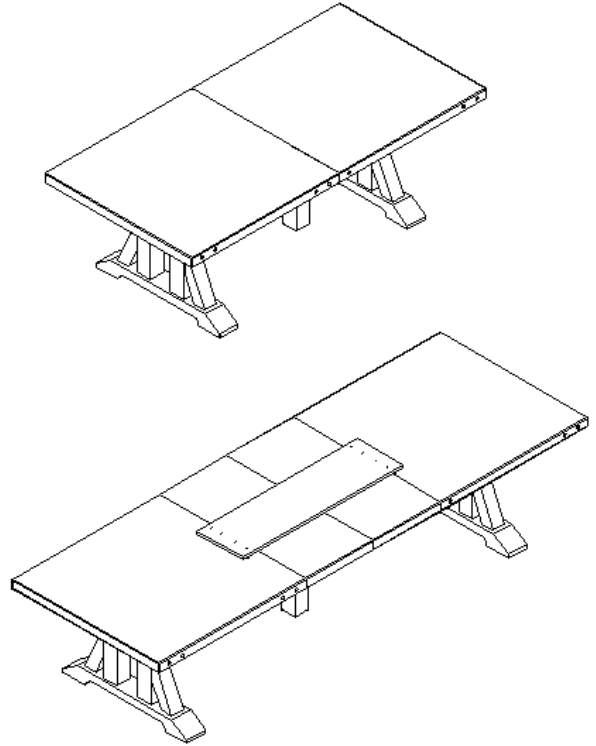


Diagram1

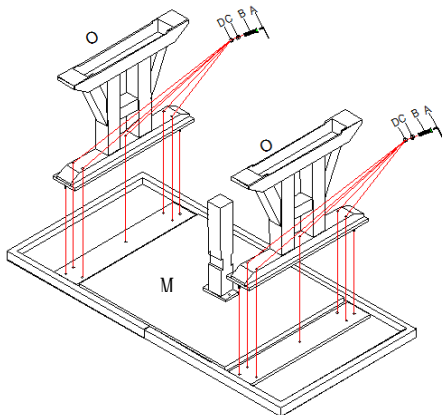


Diagram2

Assembly Steps:

1. Put table top (M) upside down on a soft place to prevent it from being scratched.
2. Attach center leg (N) to table top (M) as labeled by using bolt (E), lock washer (C) and flat washer (D). Tighten them securely with allen wrench (A). (See diagram 1)
3. Attach base leg (O) to table top (M) by using bolt (B), lock washer (C) and flat washer (D). Tighten them securely with allen wrench (A). (See diagram 2)

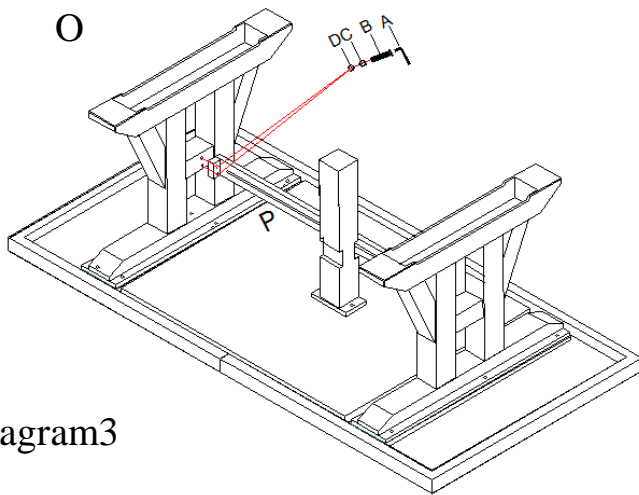


Diagram3

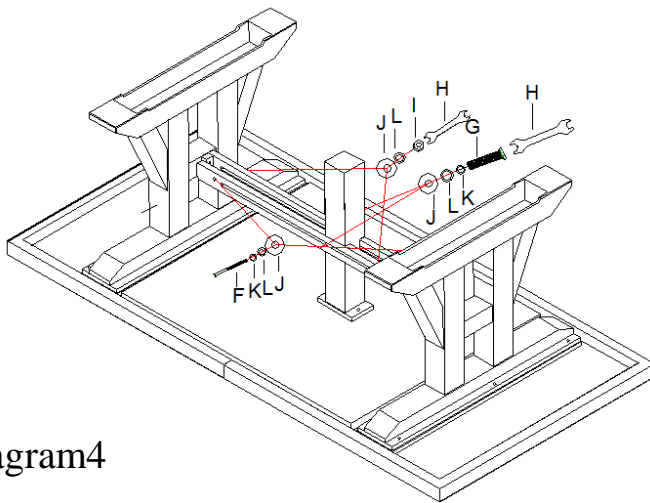


Diagram4

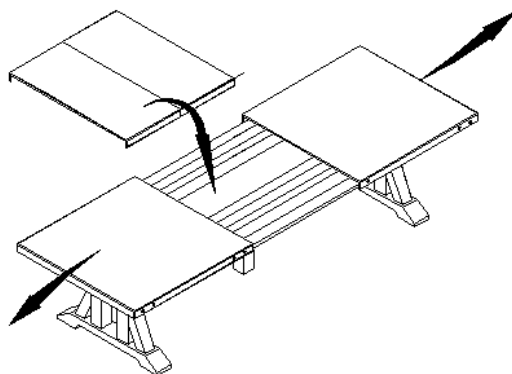
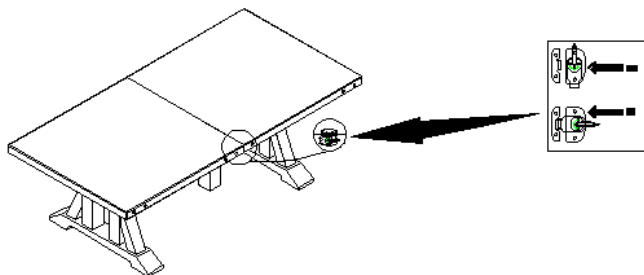


Diagram5&6

4. Insert the stretcher (P) into center hole of table base leg (O) fix it by using bolt (B), lock washer (C) and flat washer (D). Tighten them securely with allen wrench (A). (See diagram 3)
5. Repeat step 4 to install another side stretcher (p) into table legs. Tighten them on stretcher (P) left side securely with threaded rod (F), lock washer (K), flat washer (L) and rubber gasket (J). Securely them on the stretcher (P) right side with leveler wrench (H), nut (I), flat washer (L) and rubber gasket (J). Securely them on center leg with leveler wrench (H), bolt (G), lock washer (K), flat washer (L) and rubber gasket (J) . (See diagram 4)
6. Turn the table top upright. If you want to place the leaf on the table, please turn the switch to "off" position underneath top panel. Then pull out two ends of top panel, place it on top and push them together, turn the switch to "ON" position. (See diagram 5 & 6).
7. When you adjust the table top, please be sure to unstringen bolt (G) on center leg first.

Instruction for table leaves:

1. There are latches at the bottom of table top, turn on the latch ,pull out table top as the arrow direction shown in diagram 7.
2. Place table leaves (Q) between and push table tops together. Turn off latches. Put the server (R)on table top(see diagram 8)
3. Take opposite actions to remove table leaves.

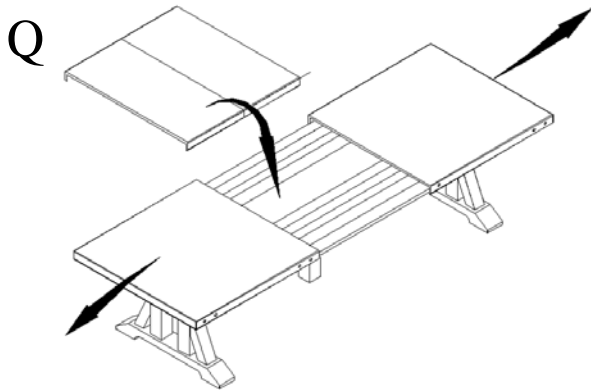


Diagram7

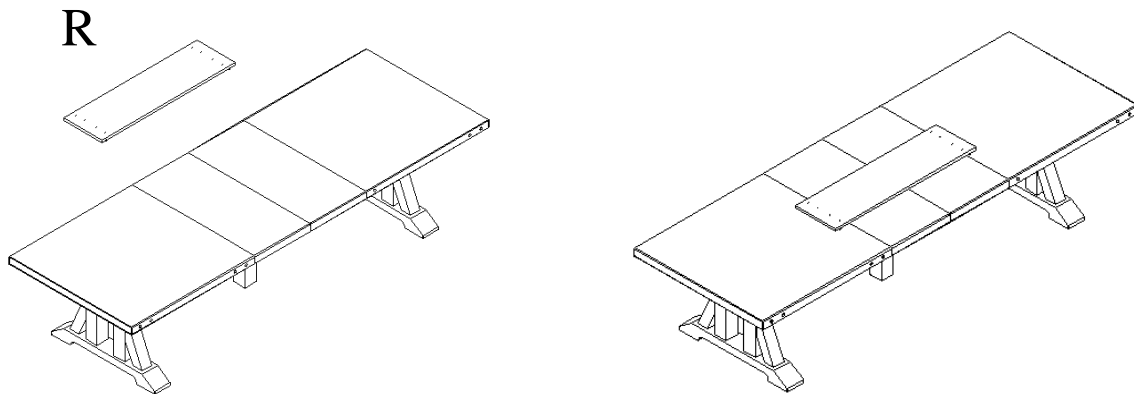


Diagram8

Cleaning Instruction: Clean finished parts with a damp cloth using a mild dishwashing liquid and water solution. Polish the finish with soft cloth and an industry recognized furniture polish.