



KITCHENAID® BUILT-IN REFRIGERATION

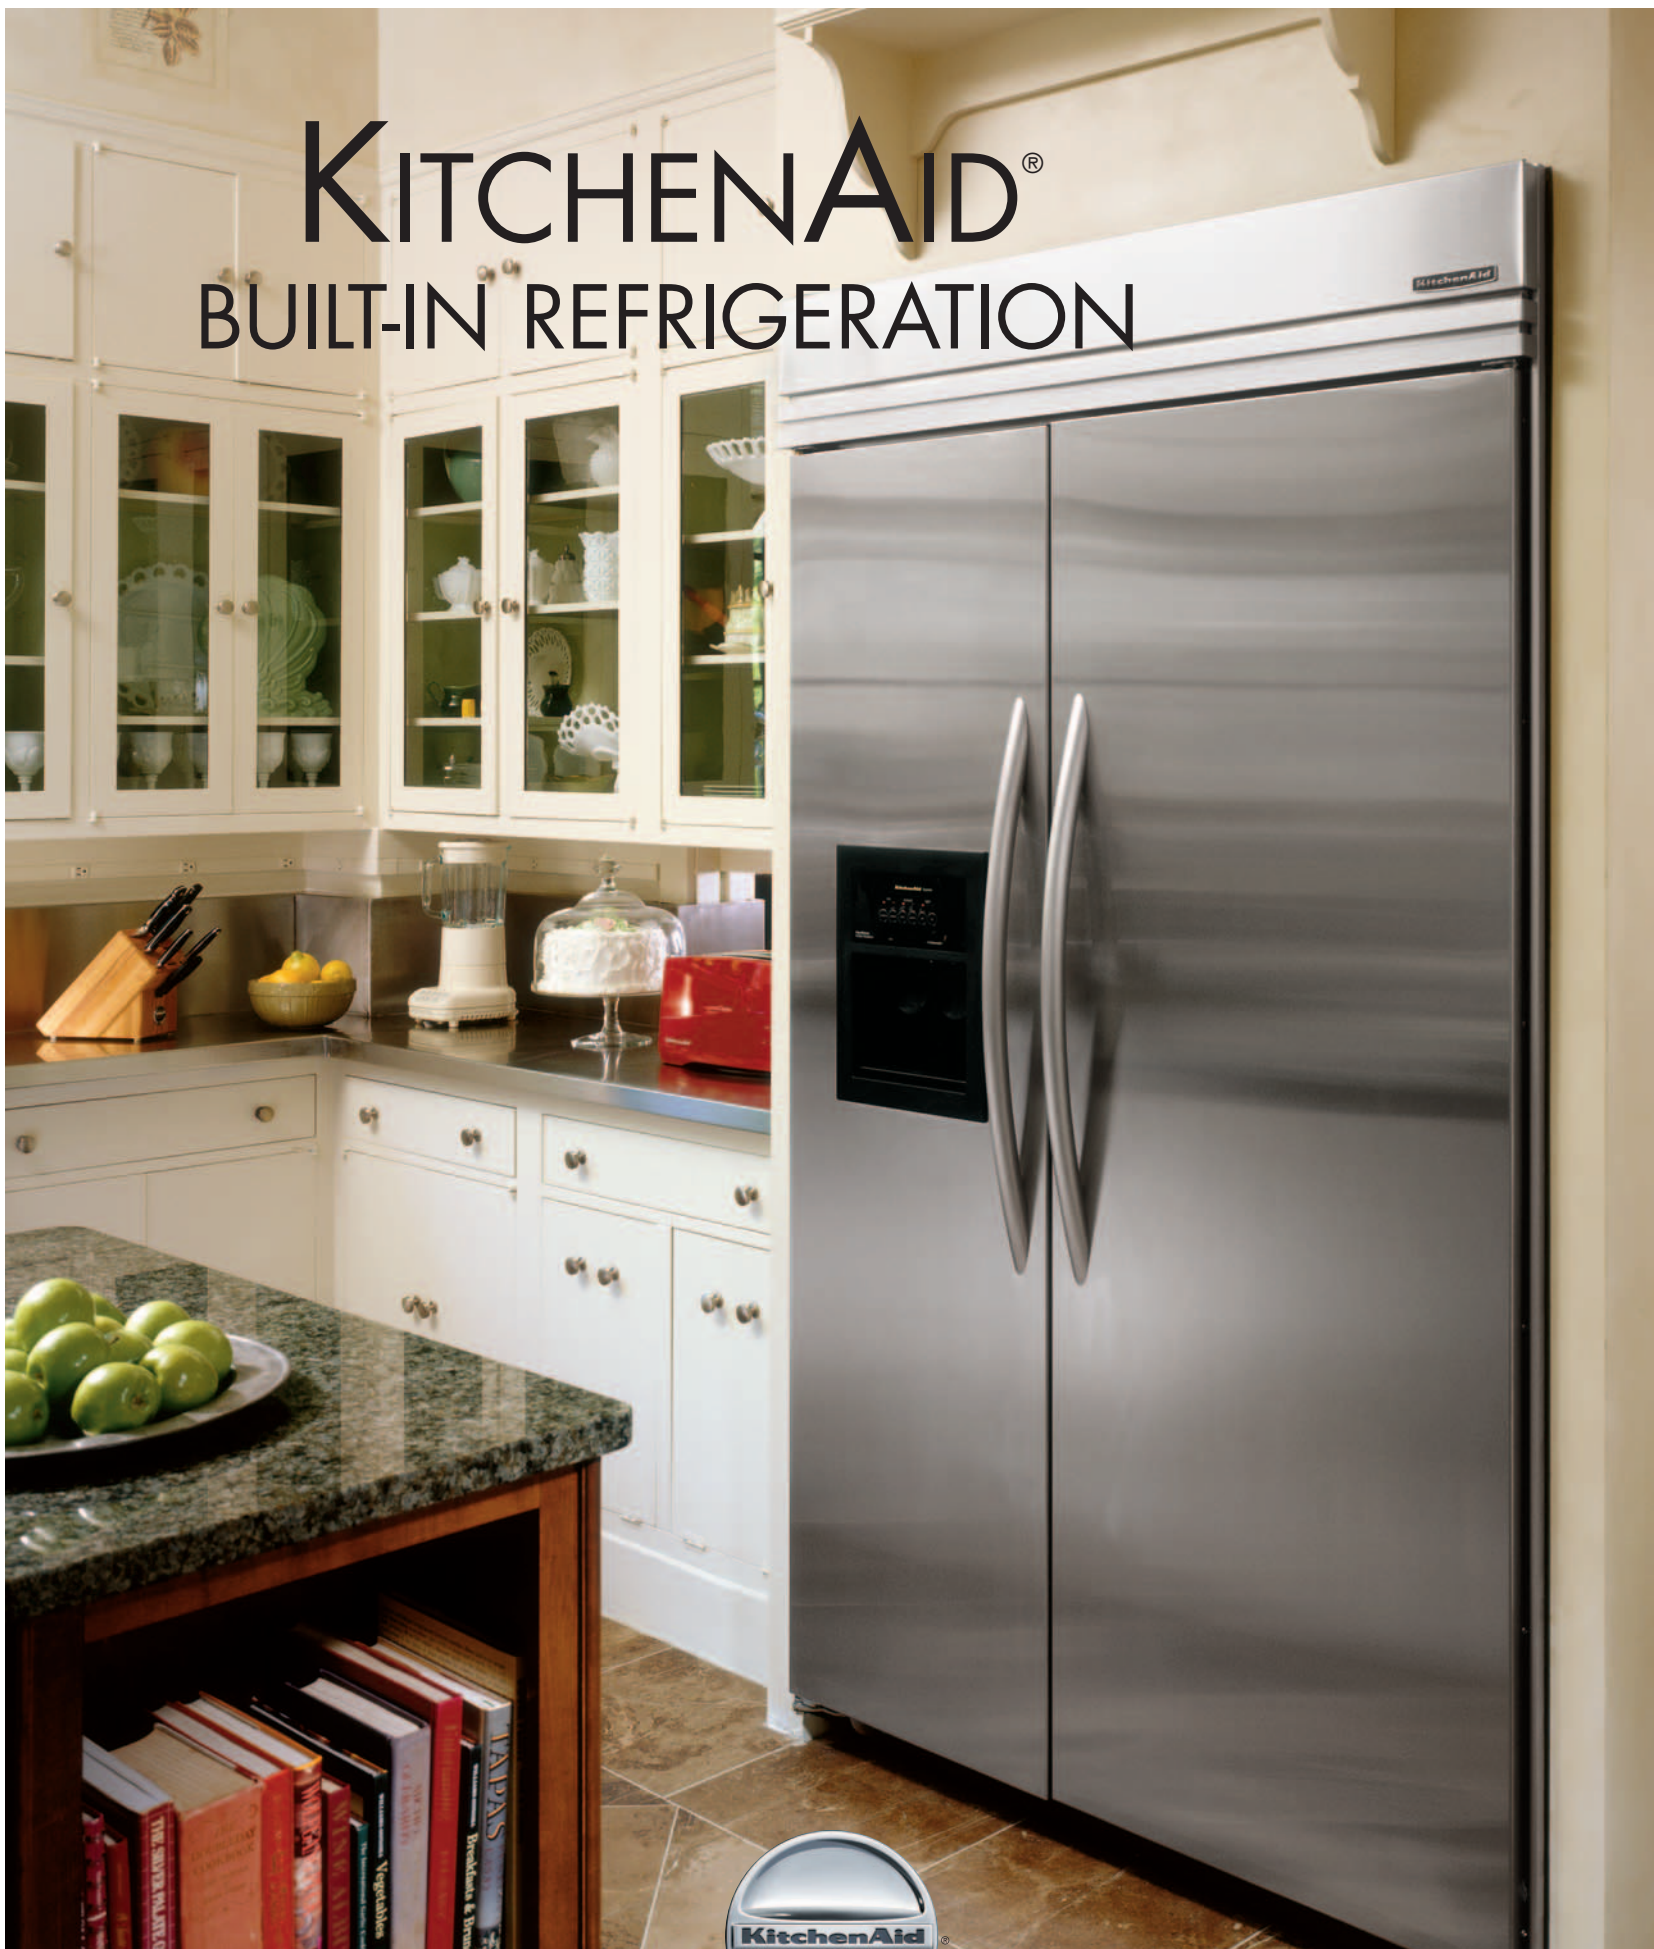

FOR THE WAY IT'S MADE.®

SIDE-BY-SIDE REFRIGERATOR PRODUCT DIMENSIONS

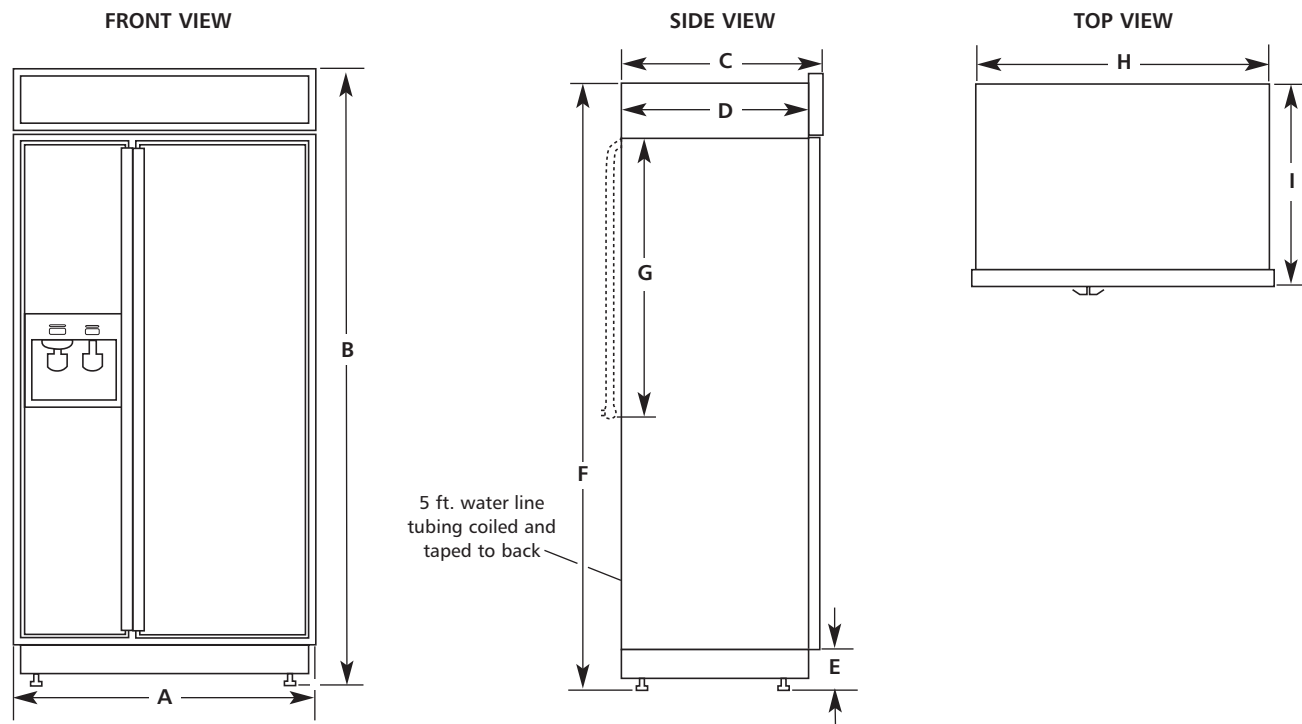

PRODUCT DIMENSIONS

Shown in inches.


	A	B*	C**	D	E*	F*	G†	H	I
48-INCH	48¼	83⅛	25⅛	23½	3½	83⅛	24	47	25
42-INCH	42¼	83⅛	25⅛	23½	3½	83⅛	24	41	25
36-INCH	36¼	83⅛	25⅛	23½	3½	83⅛	24	35	25

*Leg levelers extended ⅛" below rollers; add 1⅛" for levelers fully extended 1¼" below rollers.

**Dimension is to front of top grille.

†Power cord.

SIDE-BY-SIDE CUTOUT DIMENSIONS

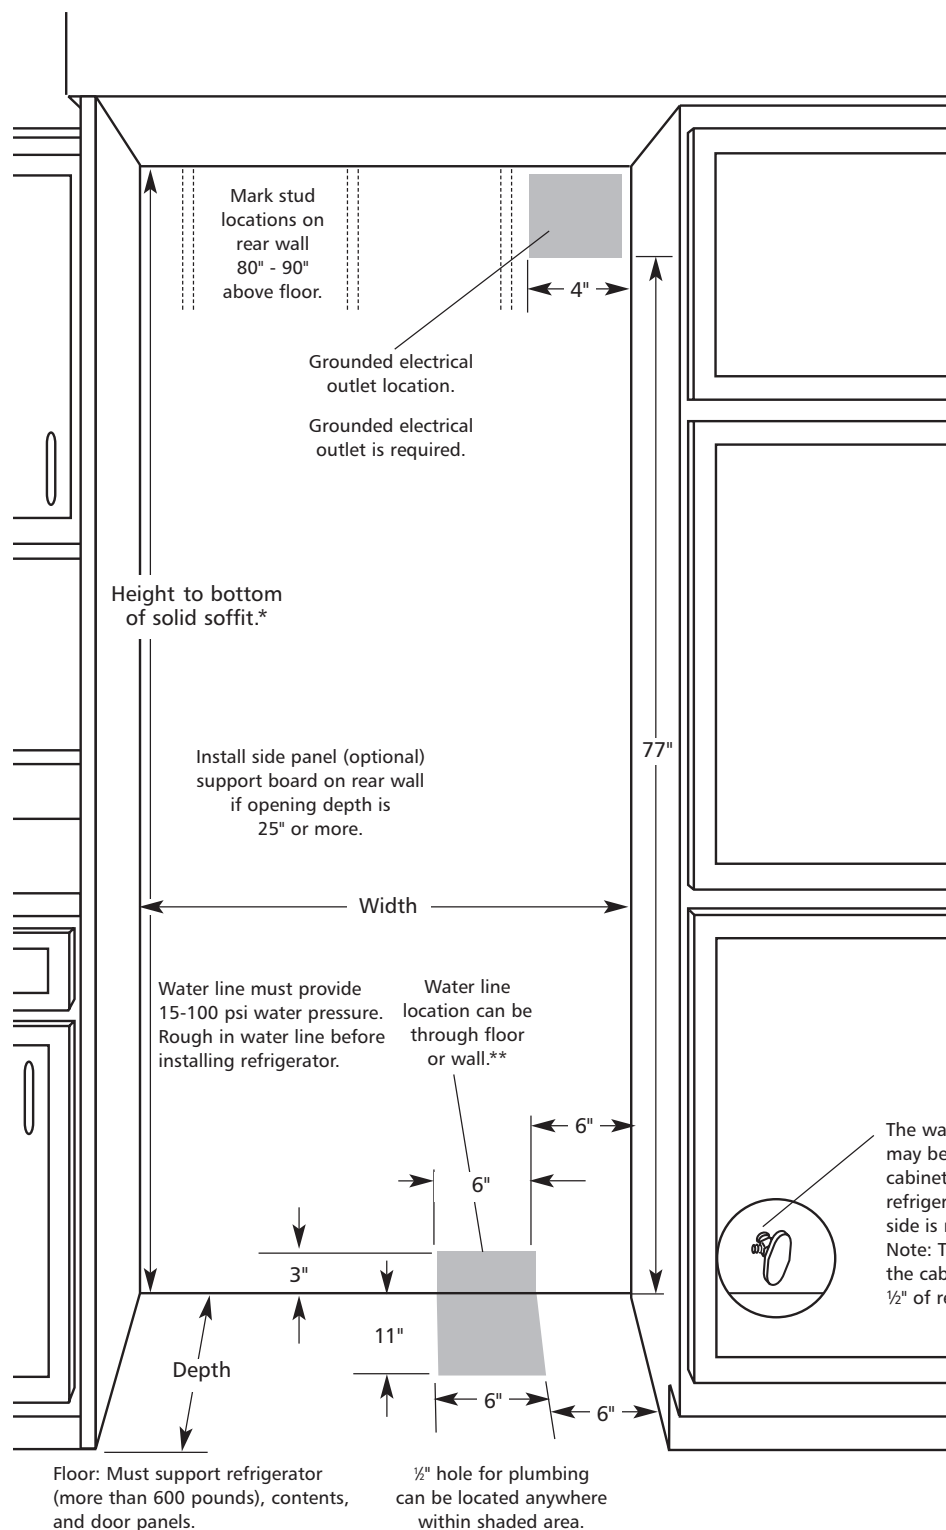**All dimensions $\pm 1/8$ "**

*The solid soffit must be within 1" maximum above the refrigerator. If the solid soffit is higher than 1" or one is not available, then the refrigerator must be braced to prevent tipping during use.

**If a recommended water line location is used, no additional plumbing needs to be purchased.

The built-in refrigerator can be installed:

- recessed in the cabinet opening.
- at the end of cabinets using a side panel to enclose the side of the refrigerator.

Select one method and use dimensions given. Dimensions shown provide 0" clearance.

Installation requires 1/2" clearance to remove top grille and for proper airflow.

OPENING DIMENSIONS

Shown in inches.

	WIDTH† (min.)	HEIGHT (min./max)	DEPTH (min.)
48-INCH	47 1/2	83 1/4/ 84 3/4	23 1/2
42-INCH	41 1/2	83 1/4/ 84 3/4	23 1/2
36-INCH	35 1/2	83 1/4/ 84 3/4	23 1/2

†To allow sufficient airflow to the compressor, side trim must be on the outside of adjoining cabinets and not recessed into the cutout.



FOR THE WAY IT'S MADE.®



CLASSIC SERIES CUSTOM SIDE-BY-SIDE PANEL DIMENSIONS

Shown in inches.

MODEL NO.	Top Grille Panel (A)	Freezer Upper Door Panel (B)	Freezer Lower Door Panel (C)	Freezer Door Panel (D)	Refrigerator Door Panel (E)
DISPENSING					
KSSS48QM	7 ³ / ₈ h x 47 ³ / ₈ w	23 ⁷ / ₁₆ h x 19 ¹ / ₄ w	34 ⁷ / ₁₆ h x 19 ¹ / ₄ w	—	70 ⁷ / ₁₆ h x 26 ¹ / ₄ w
KSSS42QM	7 ³ / ₈ h x 41 ³ / ₈ w	23 ⁷ / ₁₆ h x 16 ³ / ₄ w	34 ⁷ / ₁₆ h x 16 ³ / ₄ w	—	70 ⁷ / ₁₆ h x 22 ³ / ₄ w
KSSS36QM	7 ³ / ₈ h x 35 ³ / ₈ w	23 ⁷ / ₁₆ h x 14 ¹ / ₄ w	34 ⁷ / ₁₆ h x 14 ¹ / ₄ w	—	70 ⁷ / ₁₆ h x 19 ¹ / ₄ w
NON-DISPENSING					
KSSS48FM	7 ³ / ₈ h x 47 ³ / ₈ w	—	—	70 ⁷ / ₁₆ h x 19 ¹ / ₄ w	70 ⁷ / ₁₆ h x 26 ¹ / ₄ w
KSSS42FM	7 ³ / ₈ h x 41 ³ / ₈ w	—	—	70 ⁷ / ₁₆ h x 16 ³ / ₄ w	70 ⁷ / ₁₆ h x 22 ³ / ₄ w
KSSS36FM	7 ³ / ₈ h x 35 ³ / ₈ w	—	—	70 ⁷ / ₁₆ h x 14 ¹ / ₄ w	70 ⁷ / ₁₆ h x 19 ¹ / ₄ w

NOTE: Panels should be 1/4-in. thick, with 1/4-in. offset. Tolerance plus or minus 1/16-in. Dimensions of door and ventilation panels shown are with routed edges.

If custom door panels greater than 1/4-in. thick are used, it may be necessary to rout the handle side of the panel a minimum of 3/4-in. from the panel edge to provide a 2-in. minimum access to the door handle. Either the full length of the panel or a selected area(s) can be routed. Check with your builder.

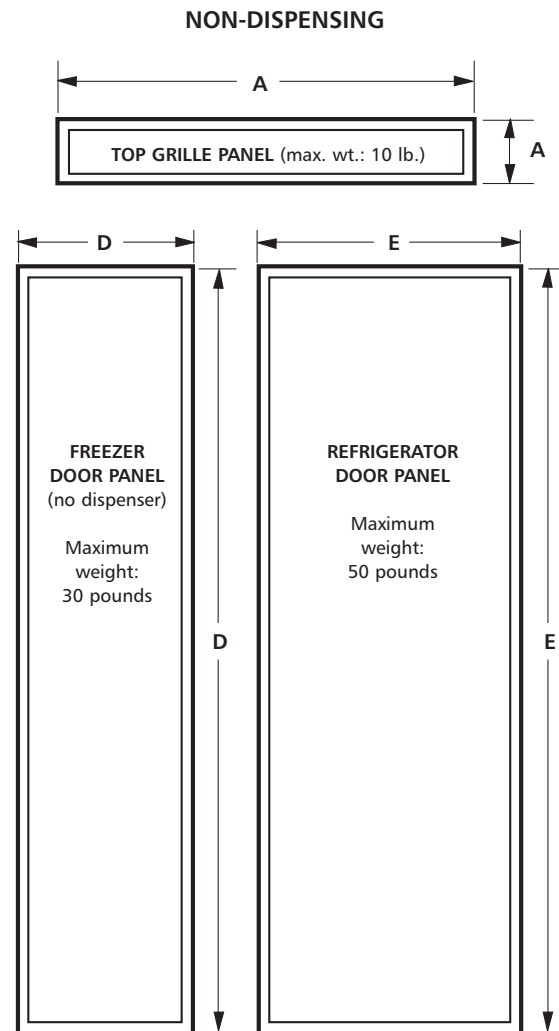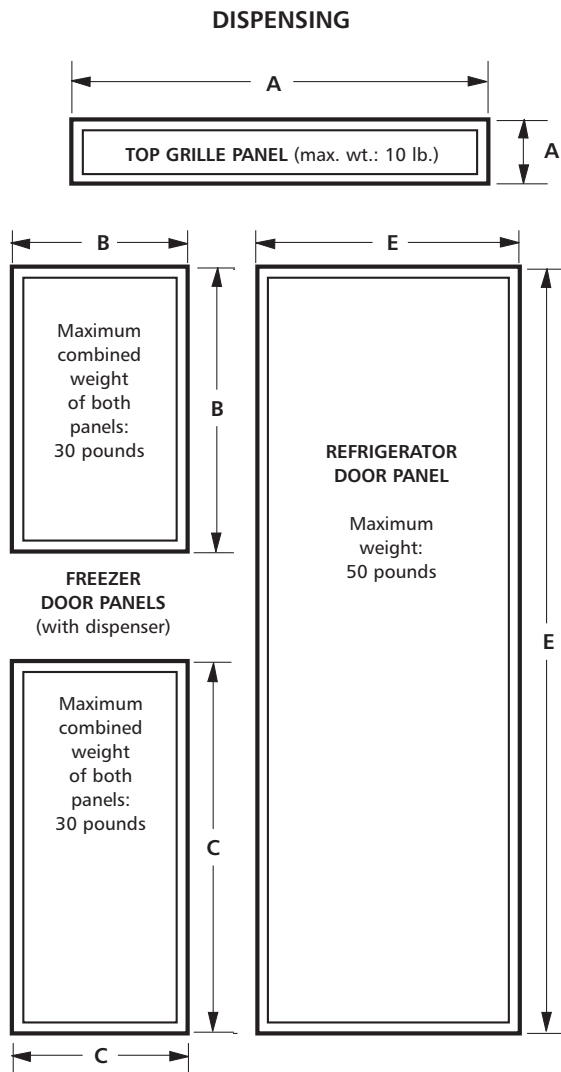

CLASSIC SERIES SIDE-BY-SIDE ACRYLIC PANEL KITS


(includes refrigerator and freezer door panels and top grille panel)

MODEL NO.	WHITE	BISCUIT	BLACK	STAINLESS
DISPENSING MODELS				
KSSS48QM	2220866	2220872	2220869	2220875
KSSS42QM	2220865	2220871	2220868	2220874
KSSS36QM	2220864	2220870	2220867	2220873
NON-DISPENSING MODELS				
KSSS48FM	2220854	2220860	2220857	2220863
KSSS42FM	2220853	2220859	2220856	2220862
KSSS36FM	2220852	2220858	2220855	2220861



CLASSIC SERIES PANEL ROUTING DIMENSIONS


For top, hinge, and bottom sides of panels.

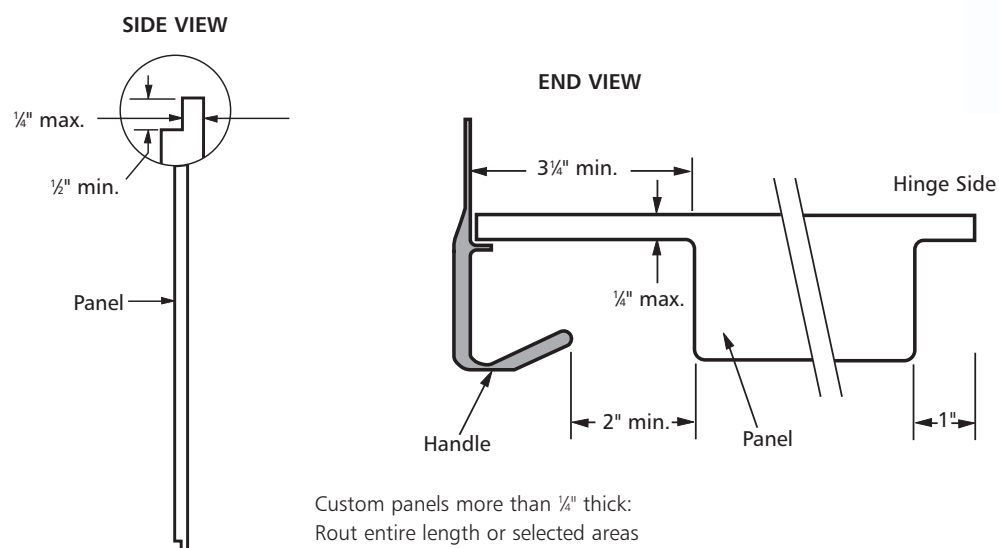

Custom panels more than 1/4" thick:
Rout entire length or selected areas
of handle side of panels 3 1/4".

CLASSIC SERIES TOP-GRILLE PANEL ROUTING DIMENSIONS

For left and right edges of panel.

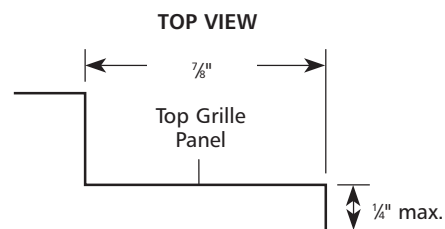

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.


FOR THE WAY IT'S MADE.®

OVERLAY SERIES CUSTOM SIDE-BY-SIDE OVERLAY PANEL DIMENSIONS


Shown in inches.

MODEL NO.	Top Grille Panel (A)	Frameless Dispenser		Framed Dispenser	Non-Dispensing	Refrigerator Door Panel (E)
		Freezer Upper Door Panel (B)	Freezer Lower Door Panel (C)	Freezer Door Panel (D)	Freezer Door Panel (D)	
DISPENSING						
KSSO48QM	8½ h x 46½ w	24 h x 19⅝ w	34¾ h x 19⅝ w	71⅛ h x 19⅝ w	—	71⅛ h x 26⅝ w
KSSO42QM	8½ h x 40½ w	24 h x 17⅛ w	34¾ h x 17⅛ w	71⅛ h x 17⅛ w	—	71⅛ h x 23⅛ w
KSSO36QM	8½ h x 34½ w	24 h x 14⅝ w	34¾ h x 14⅝ w	71⅛ h x 14⅝ w	—	71⅛ h x 19⅝ w
NON-DISPENSING						
KSSO48FM	8½ h x 46½ w	—	—	—	71⅛ h x 19⅝ w	71⅛ h x 26⅝ w
KSSO42FM	8½ h x 40½ w	—	—	—	71⅛ h x 17⅛ w	71⅛ h x 23⅛ w
KSSO36FM	8½ h x 34½ w	—	—	—	71⅛ h x 14⅝ w	71⅛ h x 19⅝ w


DISPENSING (FRAMED AND FRAMELESS)

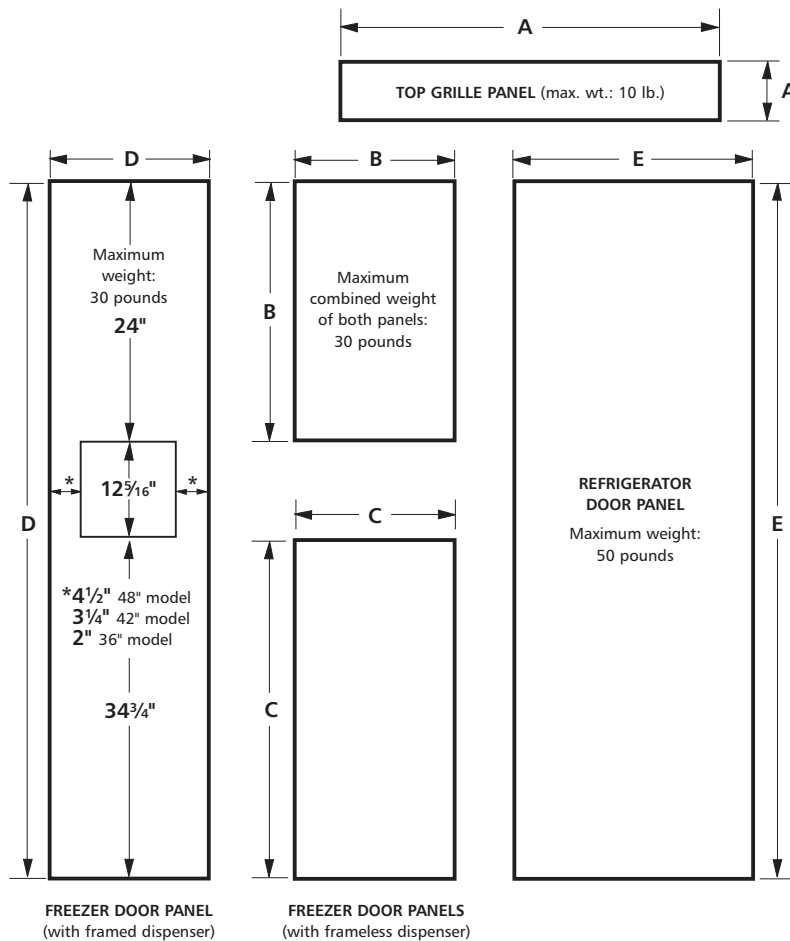

NON-DISPENSING

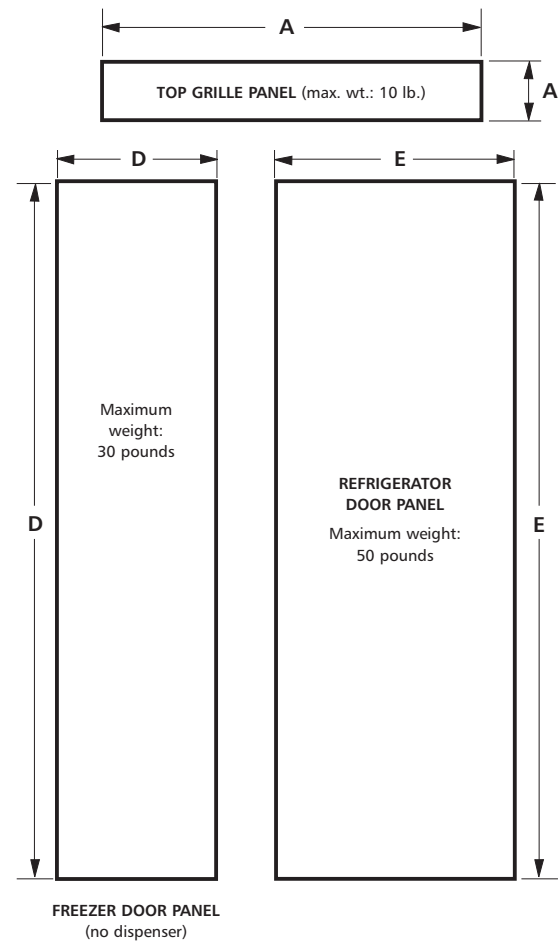

3-PIECE GRILLE OVERLAY PANEL CONFIGURATION

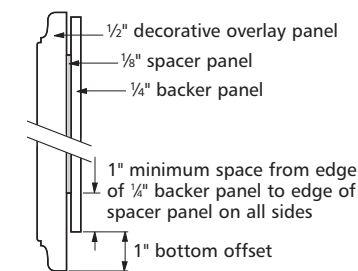

SIDE VIEW

1-PIECE GRILLE PANEL CONFIGURATION


In some cases, your cabinet manufacturer may choose to work with one panel routed for the different dimensions. Follow these panel dimension and placement instructions to be sure that the custom overlay panels will fit properly.

OVERLAY SERIES CUSTOM SIDE-BY-SIDE BACKER PANEL DIMENSIONS


Shown in inches.

MODEL NO.	Top Grille Panel (a)	Freezer Upper Door Panel (b)	Freezer Lower Door Panel (c)	Freezer Door Panel (d)	Refrigerator Door Panel (e)
DISPENSING (FRAMED OR FRAMELESS)					
KSSO48QM	7 ³ / ₈ h x 46 ¹ / ₂ w	23 ⁷ / ₁₆ h x 19 ⁷ / ₁₆ w	34 ⁷ / ₁₆ h x 19 ⁷ / ₁₆ w	—	70 ¹ / ₂ h x 26 ⁷ / ₁₆ w
KSSO42QM	7 ³ / ₈ h x 40 ¹ / ₂ w	23 ⁷ / ₁₆ h x 16 ¹⁵ / ₁₆ w	34 ⁷ / ₁₆ h x 16 ¹⁵ / ₁₆ w	—	70 ¹ / ₂ h x 22 ¹⁵ / ₁₆ w
KSSO36QM	7 ³ / ₈ h x 34 ¹ / ₂ w	23 ⁷ / ₁₆ h x 14 ⁷ / ₁₆ w	34 ⁷ / ₁₆ h x 14 ⁷ / ₁₆ w	—	70 ¹ / ₂ h x 19 ⁷ / ₁₆ w
NON-DISPENSING					
KSSO48FM	7 ³ / ₈ h x 46 ¹ / ₂ w	—	—	70 ¹ / ₂ h x 19 ⁷ / ₁₆ w	70 ¹ / ₂ h x 26 ⁷ / ₁₆ w
KSSO42FM	7 ³ / ₈ h x 40 ¹ / ₂ w	—	—	70 ¹ / ₂ h x 16 ¹⁵ / ₁₆ w	70 ¹ / ₂ h x 22 ¹⁵ / ₁₆ w
KSSO36FM	7 ³ / ₈ h x 34 ¹ / ₂ w	—	—	70 ¹ / ₂ h x 14 ⁷ / ₁₆ w	70 ¹ / ₂ h x 19 ⁷ / ₁₆ w


DISPENSING (FRAMED AND FRAMELESS)

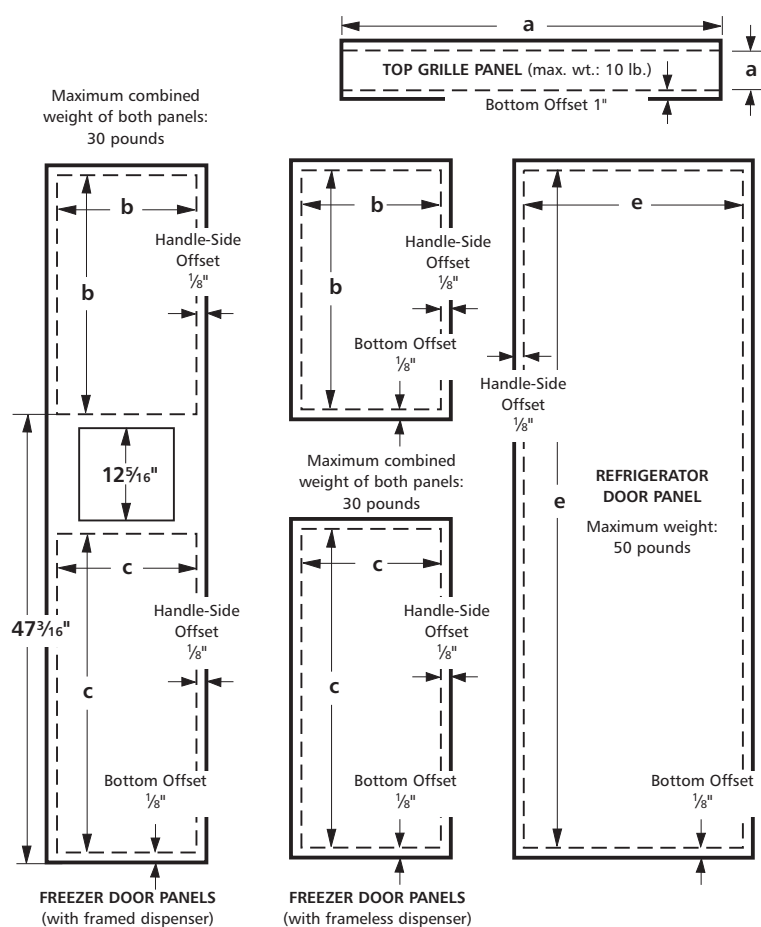

NON-DISPENSING

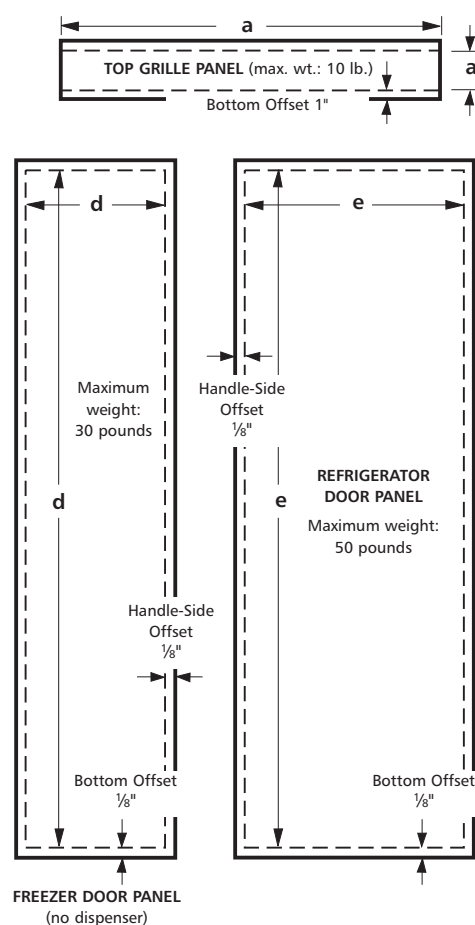

DOOR OVERLAY PANEL CONFIGURATION

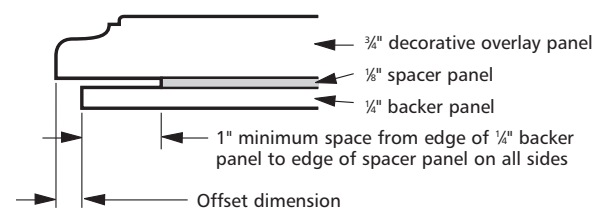


NOTE: To create a flush appearance, the overlay door panel should be 1/4" thicker than the overlay grille panel.



Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

BOTTOM-FREEZER REFRIGERATOR PRODUCT DIMENSIONS

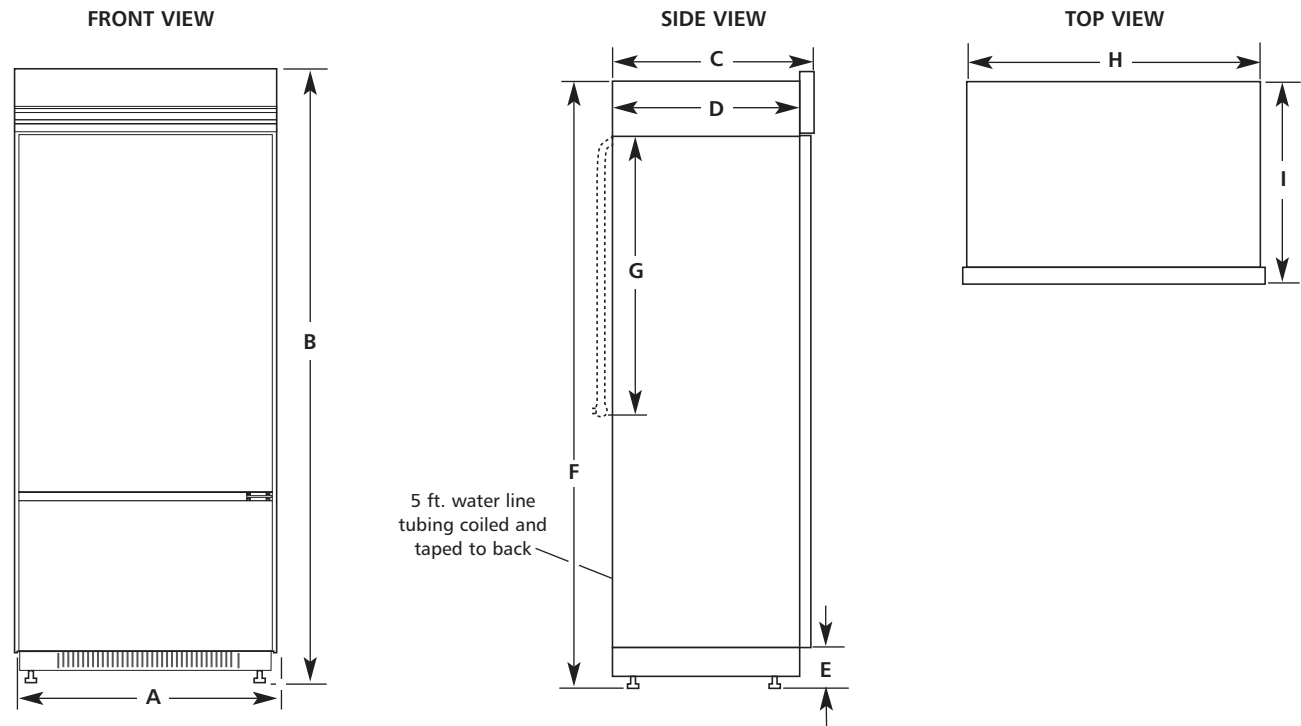

PRODUCT DIMENSIONS

Shown in inches.


	A	B*	C**	D	E*	F*	G†	H	I
36-INCH	36¼	83⅛	25⅛	23½	3½	83⅛	24	35	25

*Leg levelers extended ⅛" below rollers; add 1⅛" for levelers fully extended 1¼" below rollers.

**Dimension is to front of top grille.

†Power cord.

BOTTOM-FREEZER CUTOUT DIMENSIONS

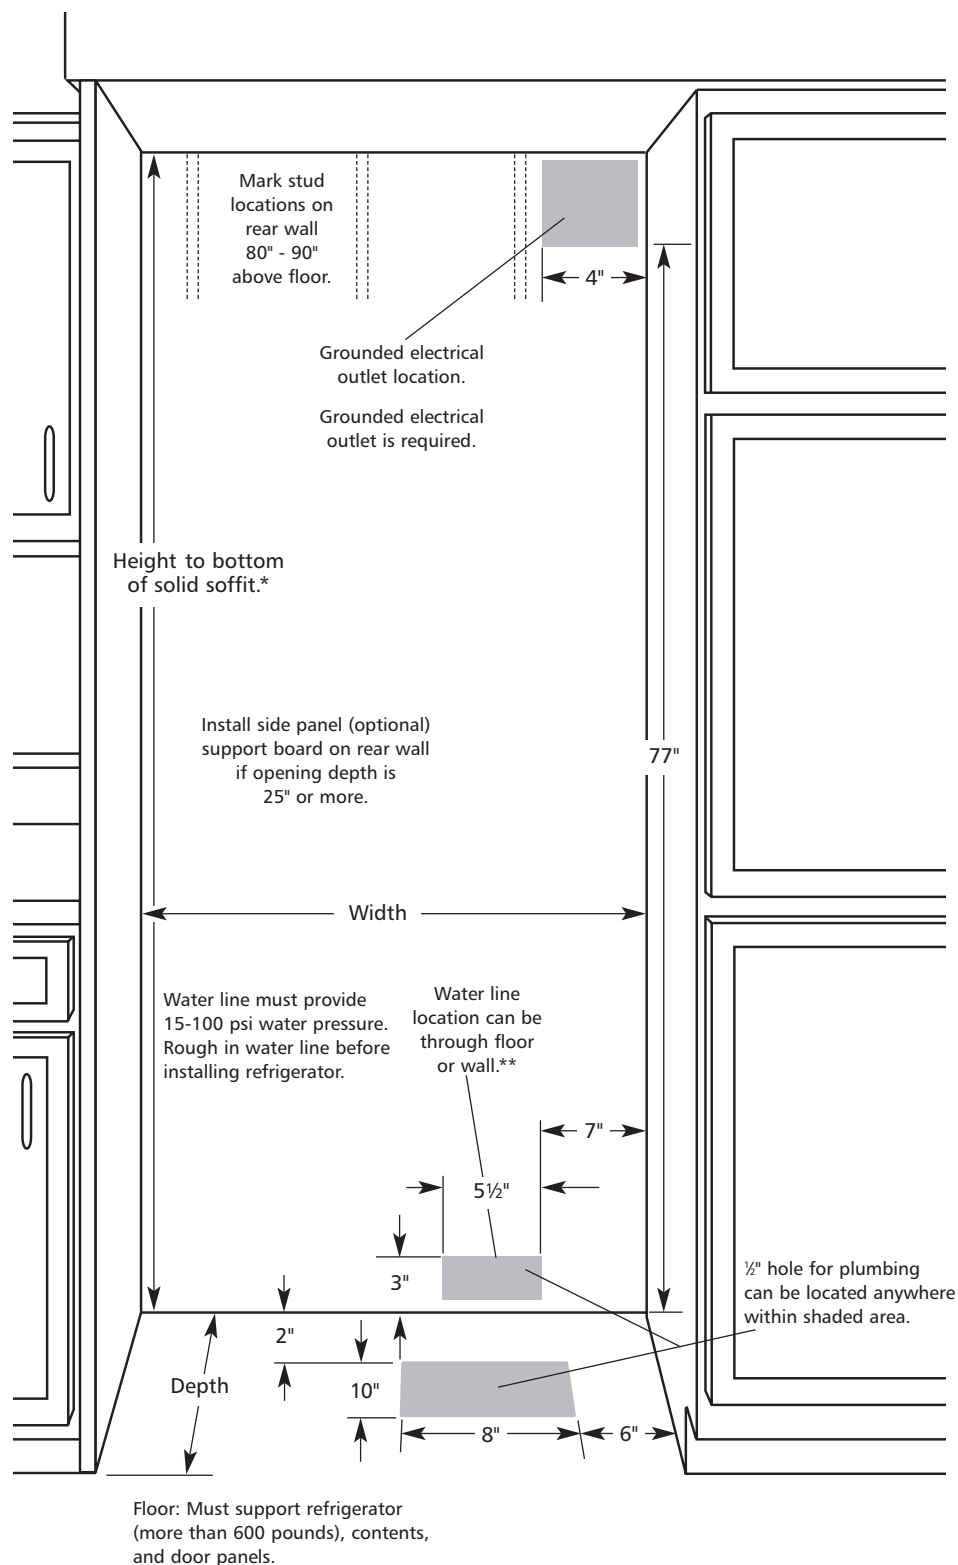

All dimensions $\pm \frac{1}{8}$ "

*The solid soffit must be within 1" maximum above the refrigerator. If the solid soffit is higher than 1" or one is not available, then the refrigerator must be braced to prevent tipping during use.

**If a recommended water line location is used, no additional plumbing needs to be purchased.

The built-in refrigerator can be installed:

- recessed in the cabinet opening.
- at the end of cabinets using a side panel to enclose the refrigerator side.

Select one method and use dimensions given. Dimensions shown provide 0" clearance.

Installation require ½" clearance to remove top grille and for proper airflow.

OPENING DIMENSIONS

Shown in inches.

	WIDTH† (min.)	HEIGHT (min./max)	DEPTH (min.)
36-INCH	35½	83¼/ 84¾	23½


†To allow sufficient airflow to the compressor, side trim must be on the outside of adjoining cabinets and not recessed into the cutout.



Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.


FOR THE WAY IT'S MADE.®

CLASSIC SERIES BOTTOM-FREEZER REFRIGERATOR CUSTOM PANEL DIMENSIONS

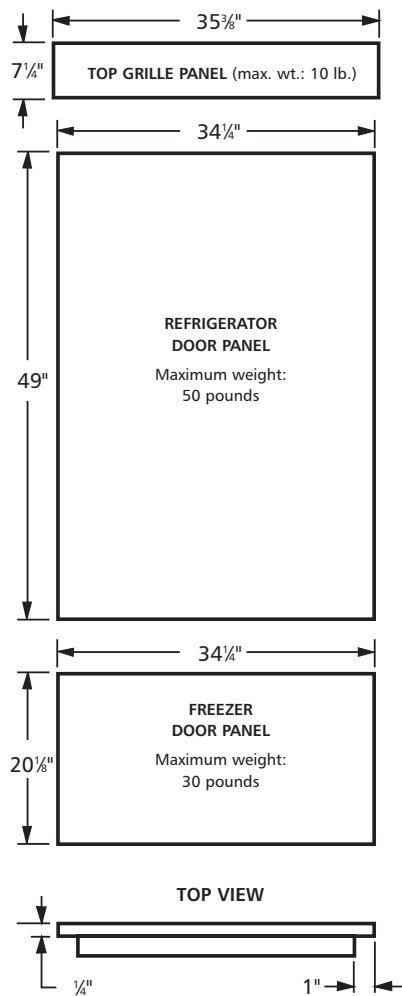


CLASSIC SERIES PANEL ROUTING DIMENSIONS

For top, hinge, and bottom sides of panels.

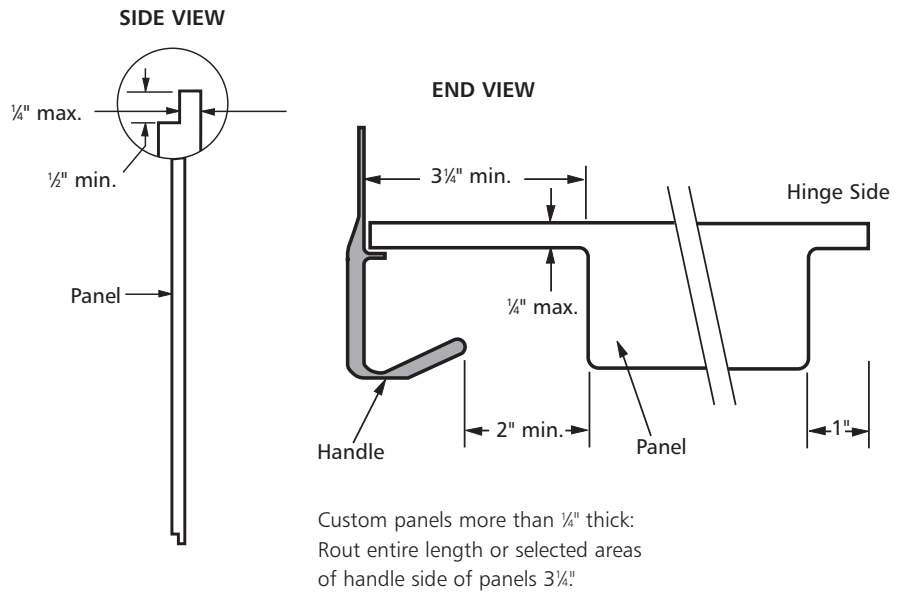

CLASSIC SERIES TOP-GRILLE PANEL ROUTING DIMENSIONS

For left and right edges of panel.

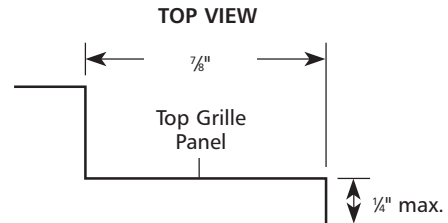



BOTTOM-FREEZER ACRYLIC PANEL, GRILLE, AND TRIM KITS

	WHITE	BISCUIT	BLACK	STAINLESS
CLASSIC SERIES				
Panel Kit	2300072	—	2300073	2300074
72" Grille, Trim, & Panel Kit (fits both left- and right-hinge models)*	2300075	2302860	2300076	2300077
ARCHITECT® SERIES				
72" Grille & Trim Kit	—	—	—	2302797
OVERLAY SERIES				
72" Trim Kit	2300078			


*Will also accept a wood panel after the acrylic panel has been removed.



OVERLAY SERIES BOTTOM-FREEZER REFRIGERATOR CUSTOM PANEL DIMENSIONS

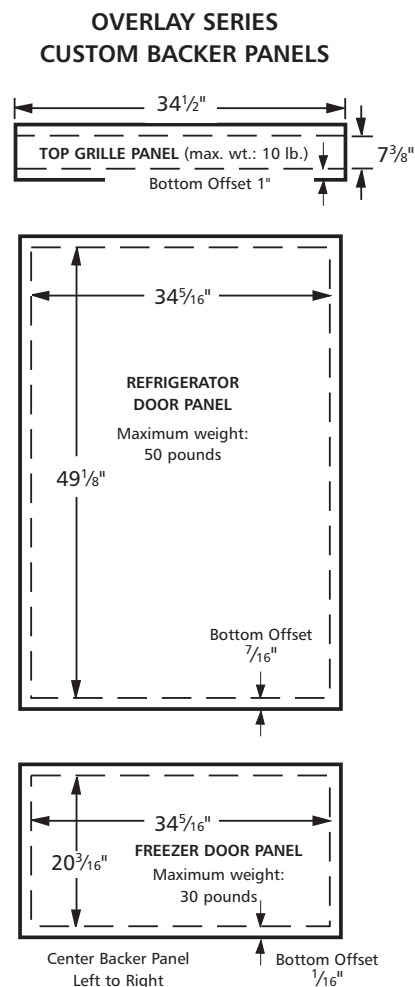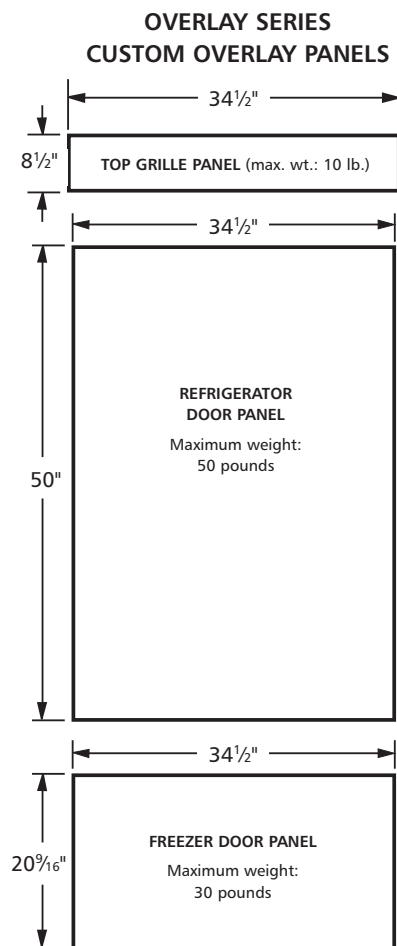


3-PIECE GRILLE OVERLAY PANEL CONFIGURATION

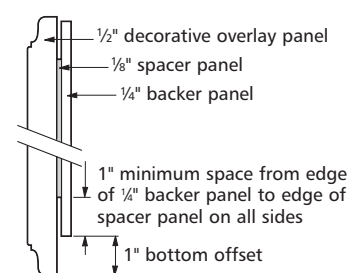

SIDE VIEW

DOOR OVERLAY PANEL CONFIGURATION

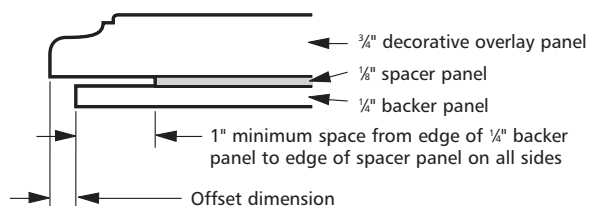

1-PIECE GRILLE PANEL CONFIGURATION

In some cases, your cabinet manufacturer may choose to work with one panel routed for the different dimensions. Follow these panel dimension and placement instructions to be sure that the custom overlay panels will fit properly.

NOTE: To create a flush appearance, the overlay door panel should be $\frac{1}{4}"$ thicker than the overlay grille panel.



Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

OVERLAY SERIES

HANDLES

Can be installed on side-by-side and bottom-freezer refrigerators that require overlay panels.

PART NO.	DESCRIPTION
920002-001	Flat End Straight – 21" Length, Satin Stainless Steel
920003-001	Flat End Straight – 45" Length, Satin Stainless Steel
920005-001	Round End Semicircle, Satin Stainless Steel*
920006-001	Round End Arc, Satin Stainless Steel*

*Available for non-dispensing models only.

STANDOFFS

(includes screws to support 3/4" applications)

Can be installed on side-by-side and bottom-freezer refrigerators that require overlay panels. (2 standoff must be ordered for each handle.) Handles and standoffs may be combined to meet your individual decorating needs.

PART NO.	DESCRIPTION
920012-001	Clamshell, Satin Stainless Steel
920012-004	Clamshell, Satin Bronze
920013-001	Bullet, Satin Stainless Steel
920013-004	Bullet, Satin Bronze
920014-001	Cylinder, Satin Stainless Steel
920014-004	Cylinder, Satin Bronze



ARCHITECT® SERIES


HANDLES

PART NO.	COLOR
4396103	Stainless
8171760	Biscuit
4396105	White
4396106	Black



Architect® handle
(4396103)

ARCHITECT® HANDLE INSTALLATION

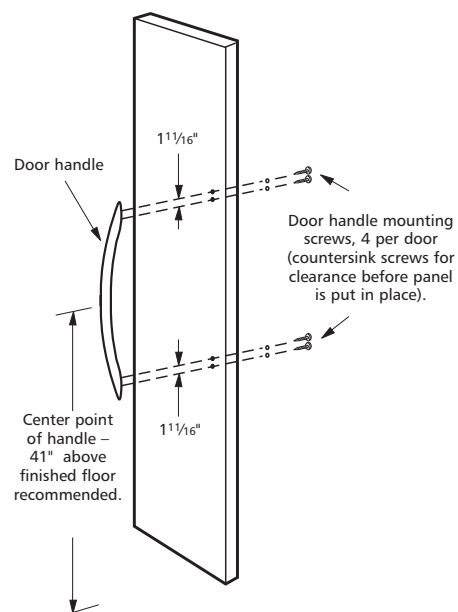


Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.


FOR THE WAY IT'S MADE.®

ICE MAKER DIMENSIONS


PRODUCT DIMENSIONS – 18-INCH ICE MAKERS

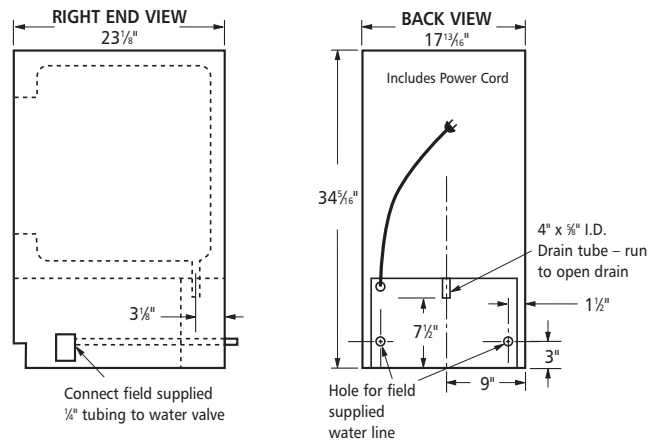


CUTOUT DIMENSIONS – 18-INCH ICE MAKERS

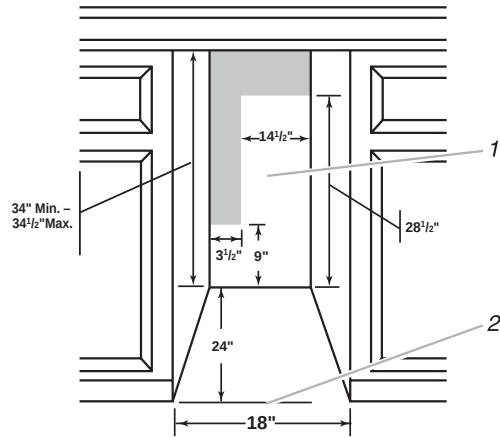

PRODUCT DIMENSIONS – 15-INCH ICE MAKERS

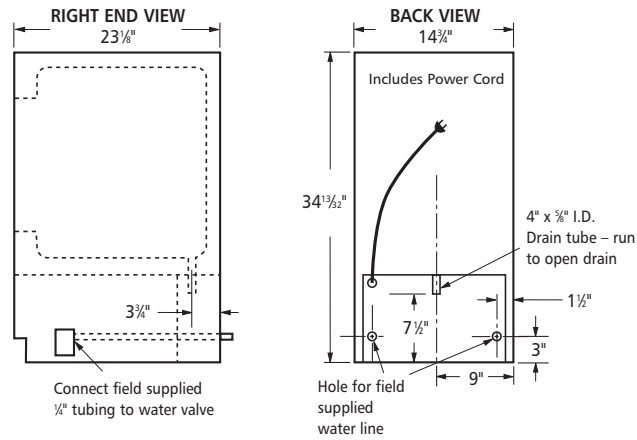




CUTOUT DIMENSIONS – 15-INCH ICE MAKERS

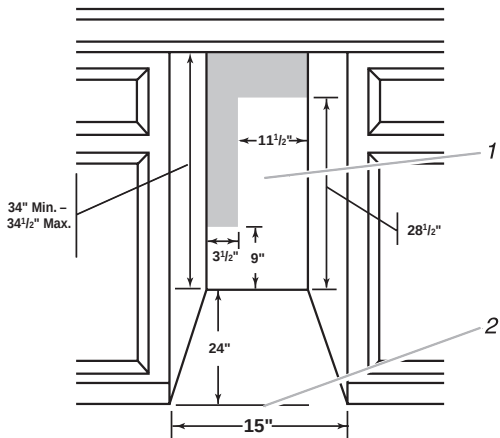

FILLER KIT ACCESSORY

ICE MAKER MODEL NO.	COLOR	PART NO.
KUIS15NRHB	Black	8171485
KUIS15PRHB		
KUIS15NRHW	White	8171484
KUIS15PRHW		
KUIS15NRHT	Biscuit	8171486
KUIS15NRHS	Black-on-Stainless	8171487
KUIA15NRHS	Stainless	8171487


CUSTOM PANEL DIMENSIONS

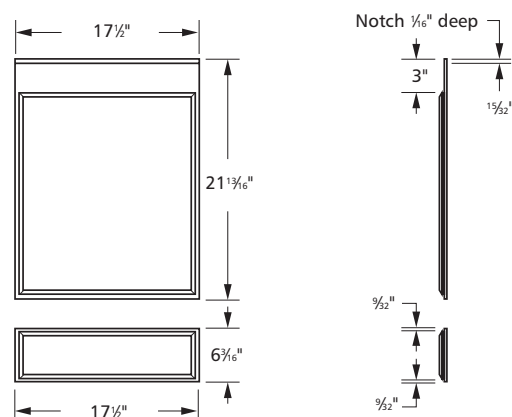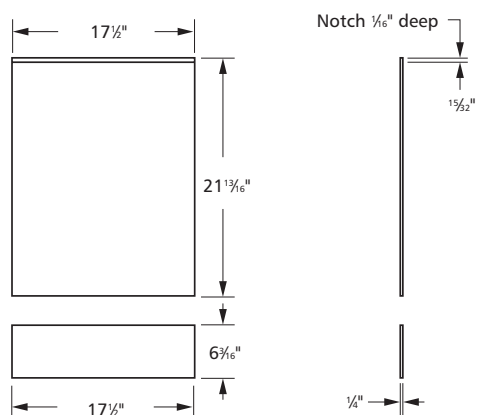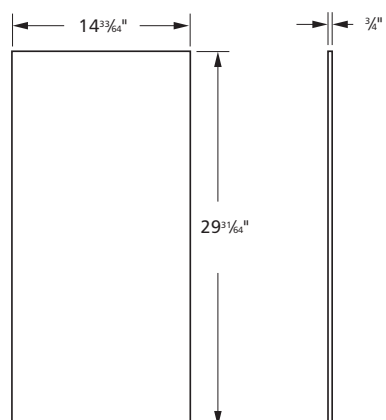18-INCH ICE MAKERS – $\frac{3}{4}$ " THICK PANEL18-INCH ICE MAKERS – $\frac{1}{4}$ " THICK PANEL15-INCH ICE MAKERS – $\frac{3}{4}$ " THICK PANEL

ICE MAKER ACCESSORY TRIM KITS

ICE MAKER MODEL NO.	COLOR	PART NO.
18-INCH ICE MAKERS		
KUIS18NNJB	Black	2929911B
KUIS18PNJB		
KUIS18NNJW	White	2929911W
KUIS18PNJW		
KUIS18NNJT	Biscuit	2929911T
KUIS18NNJS	Black-on-Stainless	2929911S
15-INCH ICE MAKERS		
KUIS15NRHB	Black	8171345
KUIS15PRHB		
KUIS15NRHW	White	8171343
KUIS15PRHW		
KUIS15NRHT	Biscuit	8171346
KUIS15NRHS	Black-on-Stainless	8171347

WINE CELLAR DIMENSIONS

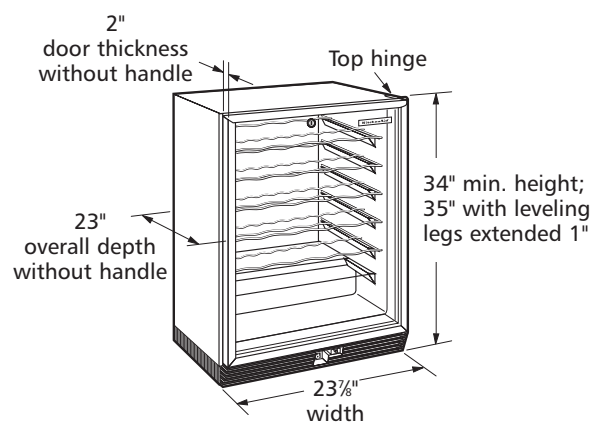

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

FOR THE WAY IT'S MADE.®