



48-INCH GAS RANGETOP W/ EMBEDDED GRIDDLE

DTT48M967 | CONTEMPORARY STYLE



AVAILABLE MODELS

- DTT48M976LS 48" Rangetop, Stainless Steel, Natural Gas
- DTT48M976PS 48" Rangetop, Stainless Steel, Liquid Propane
- DTT48M976HS 48" Rangetop, Stainless Steel, Natural Gas/High Altitude
- DTT48M976AS 48" Rangetop, Stainless Steel, Liquid Propane/ High Altitude
- DTT48M976LM 48" Rangetop, Graphite Stainless Steel, Natural Gas
- DTT48M976PM 48" Rangetop, Graphite Stainless Steel, Liquid Propane
- DTT48M976HM 48" Rangetop, Graphite Stainless Steel, Natural Gas/High Altitude
- DTT48M976AM 48" Rangetop, Graphite Stainless Steel, Liquid Propane/High Altitude

FEATURES & BENEFITS

- 6 Dual-Stack Sealed Burners + Electric Griddle.
- Powerful 22K BTU and true simmer burners.
- Continuous grates.
- Illumina™ Knobs and Ambient Light.
- Includes brass and black burner caps.
- Available in graphite stainless steel and silver stainless steel finish.

ACCESSORIES (INCLUDED)

- WOK RING
- BRASS BURNER CAPS
- BLACK BURNER CAPS

BURNER PERFORMANCE

TOTAL NUMBER OF COOKTOP BURNERS	6 (BRASS)
LEFT FRONT (BTU)	18,000 DUAL (SIMMER)
LEFT REAR (BTU)	16,000 STACK DUAL (SIMMER)
CENTER FRONT (BTU)	22,000 DUAL (SIMMER)
CENTER REAR (BTU)	9,000 STACK DUAL (SIMMER)
RIGHT FRONT (BTU)	16,000 STACK DUAL (SIMMER)
RIGHT REAR (BTU)	16,000 STACK DUAL (SIMMER)
SEALED BURNERS	YES

GRIDDLE PERFORMANCE

ELECTRIC	1,400W
----------	--------

CONTROL FEATURES

LED KNOB BACKLIGHTING	YES
LED AMBIENT LIGHTING	YES
LED CONTROL BUTTON	YES
WI FI CONNECT LED	YES
WI FI CONNECT BUTTON	YES
BLUETOOTH CONNECT LED	YES
BLUETOOTH CONNECT BUTTON	YES

ADDITIONAL FEATURES

RE-IGNITION	YES
OIL PAN	YES

INSTALLATION

GAS TYPE	NATURAL GAS/ LIQUID PROPANE
HIGH ALTITUDE AVAILABLE	YES
POWER CORD	YES

TECHNICAL DETAILS

CIRCUIT BREAKER (A)	15
VOLTS (V)	120
FREQUENCY (HZ)	60
ENERGY SOURCE	GAS AND ELECTRIC




DIMENSIONS & WEIGHT

APPLIANCE DIMENSIONS (H X W X D) (IN.)	8" X 48" X 27 1/2"
REQUIRED CUTOUT SIZE (H X W X D) (IN.)	7 3/4" X 48" X 24"

WARRANTY


LIMITED, PARTS AND LABOR	2 YEARS
--------------------------	---------

APPLIANCE DIMENSIONS

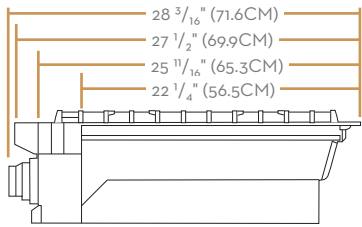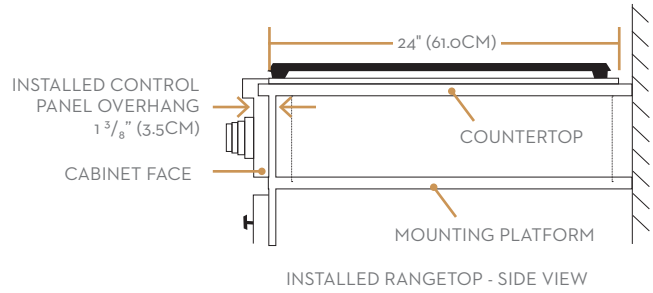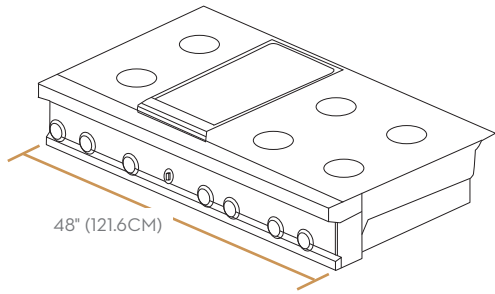


CABINET/COUNTERTOP DIMENSIONS

10" (25.4CM) TO COMBUSTIBLE SIDE WALL MIN. BOTH SIDES

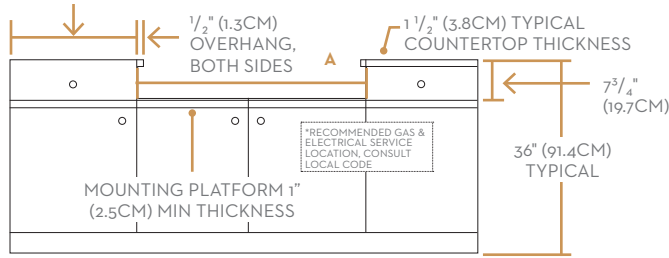

CABINET / COUNTERTOP DIMENSIONS - FRONT VIEW


*NOTE: PRODUCT TOLERANCE +/- 1/16" (+/- 1.6MM)-o UNLESS OTHERWISE NOTED

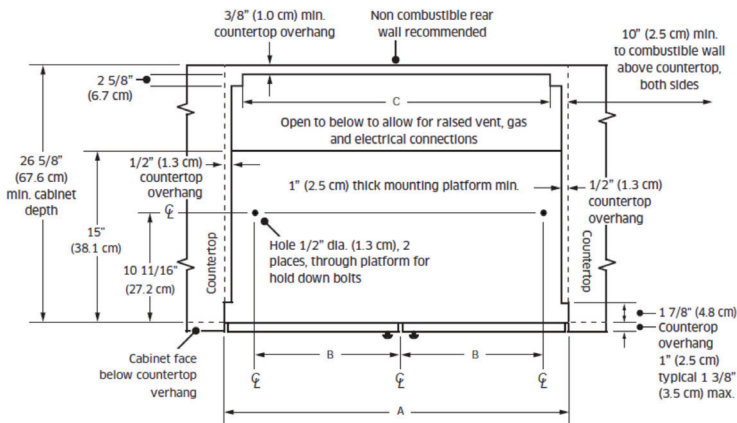

CABINET/COUNTERTOP CUTOUT DIMENSIONS WITH DOWNDRAFT VENT - TOP VIEW.

48"


A - CUTOUT WIDTH	48" (121.9CM)
B - HOLE OFFSET	20 13/16" (52.9CM)
C - DOWNDRAFT VENT CUTOUT	43 1/2" (110.5CM)
APPROVED DOWNDRAFT VENT MODELS	MRV48

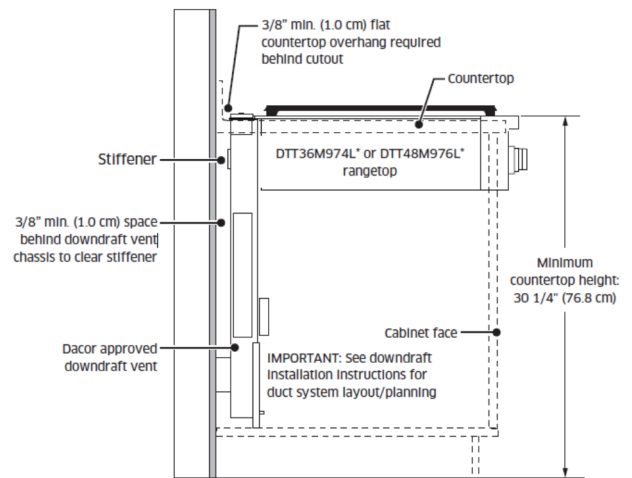

CABINET/COUNTERTOP CUTOUT DIMENSIONS WITH DOWNDRAFT VENT - SIDE VIEW

NOTE: Gas and electrical connections may only be routed through the bottom of the rangetop when installed with a downdraft vent.

CABINET/COUNTERTOP CUTOUT DIMENSIONS

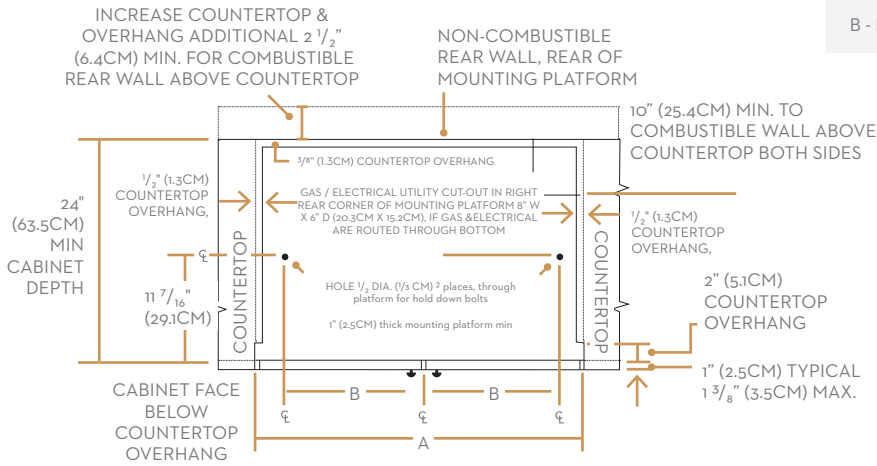


CABINET/COUNTERTOP CUTOUT DIMENSIONS WITHOUT DOWNDRAFT VENT - TOP VIEW

48"

A - CUTOUT WIDTH	48" (121.9CM)
B - HOLE OFFSET	20 13/16" (52.9CM)

CLEARANCE DIMENSIONS

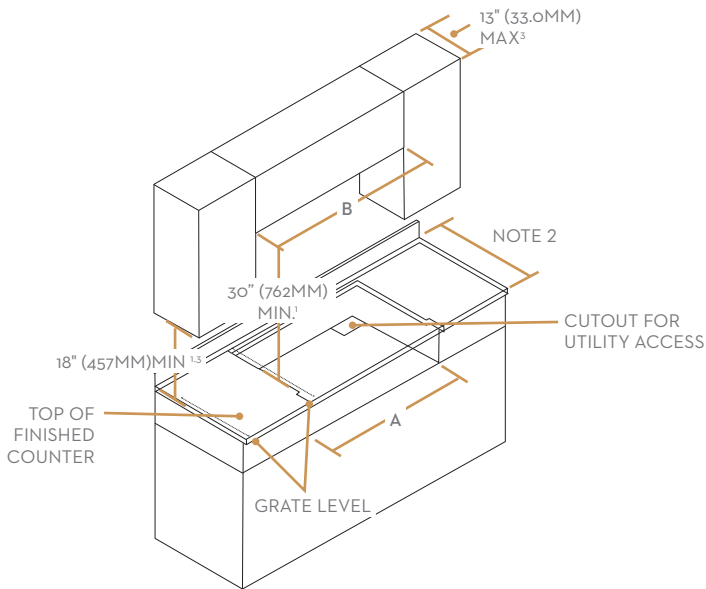

48"

A - CUTOUT WIDTH	48" (121.9CM)
B	48" (121.9CM)* MINIMUM 54" (137.2CM)** RECOMMENDED

NOTE: All vertical clearances must be maintained for a minimum of 18" (457mm) above the cooking surface.