

ELECTRA 1008 Be

Product specification sheet

New pure Beryllium IAL 1^{1/4}" (27mm) tweeter
 Very wide response from 2kHz to 40kHz
 Low resonant frequency: 680Hz

6 1/2" (165mm) 3rd generation
 "W" cone midbass
 Patented composite sandwich
 Outstanding stiffness and lightness

Body in metallic Slate Grey piano lacquer
 Panels in wood veneering, varnish 11 coats



OPC (Optimum Phase Crossover)
 Perfect staging
 Focal binding posts offering high torque and excellent contact


Advanced γ Structure
 Massive structure up to 2" (50mm) thick MDF
 No diffraction effect nor vibration

Rear laminar port
 No noise, no distortion
 Removable foam bung for bass level setting



- ◆ Made in France loudspeakers and drivers
- ◆ High size/performance ratio for optimum integration
- ◆ High Gloss S 1000 optional stand

Side panel standard finishes (body in Slate Grey)*

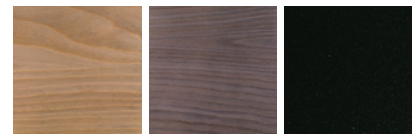

Champagne Basalt Slate Grey

* On demand finishes for side panels: Macassar and Zebrano

Type	2-way vented bookshelf loudspeaker
Drivers	6 1/2" (165mm) "W" cone midbass 1 1/4" (27mm) pure Beryllium IAL inverted dome tweeter
Frequency response (+/-3dB)	46Hz - 40kHz
Low frequency point (-6dB)	41Hz
Sensitivity (2.83V/1m)	89dB
Nominal impedance	4Ω
Minimum impedance	3.9Ω
Crossover frequency	2200Hz
Recommended amplifier power	25 - 150W
Dimensions (HxWxD)	15 3/16" x 10 3/8" x 13 3/4" (385x264x350mm)
Net weight	33lb (15kg)

The Electra 1008 Be embodies Focal's know-how in terms of high-end compact loudspeakers. Added to the essential qualities of the 1007 Be, a more spacious and natural sound image, improved definition and more precise bass. The high power handling enables it to work in rooms of big dimensions.



FOCAL
 the Spirit of Sound