

Available Q3

PRELIMINARY

JJW2430D – 30-inch

JJW2427D – 27-inch

## JENN-AIR® SINGLE WALL OVENS WITH MULTIMODE® CONVECTION SYSTEM



### SIGNATURE FEATURES

**MultiMode® Convection System** uses three radiant elements – bake, broil and convection – to provide consistent heat on every rack for evenly browned, perfectly cooked dishes.

**My Creations** seamlessly combines up to three cooking modes, selecting time and temperature for each mode, and saves those preset settings for future use.

**4.3-inch full color menu-driven LCD display** features menu-driven controls to guide selection of cooking options as well as time and temperature selections, making it easy to get the most out of all the oven's functions.

### SPECIFICATIONS

- 5.0 Cu. Ft. Oven Capacity in 30-Inch Oven
- 4.3 Cu. Ft. Oven Capacity in 27-Inch Oven
- MultiMode® Convection System
- 2,800-Watt Hidden Bake Element
- 4,000-Watt, 8-Pass Reflective Broil Element
- 3,200-Watt Convection Element
- 4.3-Inch Full Color Menu-Driven LCD Display
- Glass-Touch Electronic Controls
- My Creations
- Auto Convection Conversion
- Auto Convection Modes
- Manual Convection Modes
- Rapid Preheat
- Proofing Option
- Keep-Warm™ Option
- Temperature Probe
- Sabbath Mode
- Control Lock
- Telescoping Glide Rack
- Offset Rack
- Flush-to-Cabinet Design

### STYLE OPTIONS

Pro-Style® Stainless design includes stainless steel handle with diamond-etched grip – JJW2430DP

Euro-Style Stainless design includes slightly curved, stainless steel handle – JJW2430DS, JJW2427DS

Black Floating Glass design includes slightly curved, black handle – JJW2430DB, JJW2427DB




LIMITED  
WARRANTY


JENN-AIR®

JJW2430D  
JJW2427D**IMPORTANT:** Dimensional specifications are provided for planning purposes only.**Do not make any cutouts based on this information.** Refer to the Installation or Use & Care Guide *before* selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Jenn-Air® appliances are appropriately UL, CUL or CSA approved.

## PRODUCT DIMENSIONS


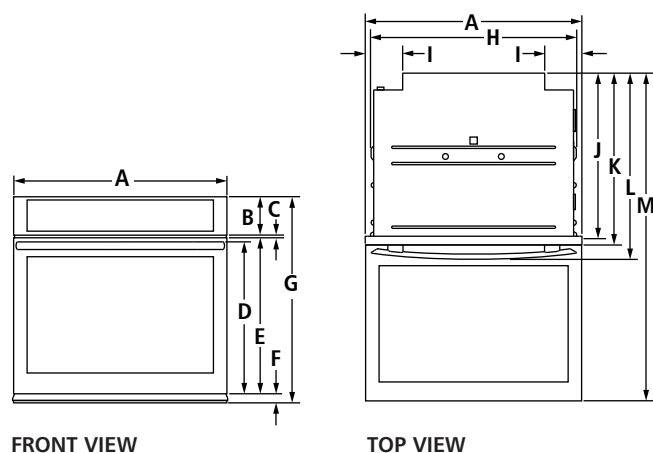


## OPENING/CLEARANCE DIMENSIONS

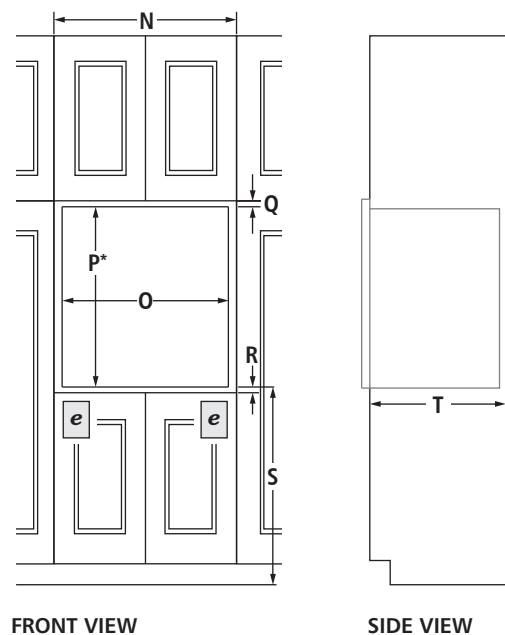

FRONT VIEW

SIDE VIEW

UNDER COUNTER INSTALLATION  
(without cooktop installed above)

BACK VIEW

MODEL #	JJW2430D		JJW2427D	
	in	cm	in	cm

PRODUCT DIMENSIONS					
A	Overall width Pro-Style® Stainless	30	76.2	—	—
	Euro-Style Stainless	30	76.2	27	68.6
	Floating Glass	29 <sup>15</sup> <sub>16</sub>	76.1	26 <sup>15</sup> <sub>16</sub>	68.4
B	Height of control panel	5½	14.0	5½	14.0
C	Space between control panel and door	7 <sub>16</sub>	1.1	7 <sub>16</sub>	1.1
D	Height to top of handle Pro-Style® Stainless	21 <sup>11</sup> <sub>16</sub>	55.0	—	—
	Euro-Style (color-coordinating)	21 <sup>7</sup> <sub>16</sub>	54.4	21 <sup>7</sup> <sub>16</sub>	54.4
E	Height of door	22 <sup>1</sup> <sub>8</sub>	56.2	22 <sup>1</sup> <sub>8</sub>	56.2
F	Height of trim	1 <sup>1</sup> <sub>16</sub>	4.3	1 <sup>1</sup> <sub>16</sub>	4.3
G	Overall height	29 <sup>7</sup> <sub>8</sub>	75.8	29 <sup>7</sup> <sub>8</sub>	75.8
H	Width of recessed oven	28 <sup>7</sup> <sub>16</sub>	72.2	25 <sup>7</sup> <sub>16</sub>	64.6
I	Width of conduit channel	3 <sup>5</sup> <sub>16</sub>	8.8	2½	6.4
J	Depth of recessed oven	23 <sup>1</sup> <sub>8</sub>	58.7	23 <sup>1</sup> <sub>8</sub>	58.7
K	Depth with door	24 <sup>5</sup> <sub>16</sub>	61.8	24 <sup>5</sup> <sub>16</sub>	61.8
L	Depth with handle Pro-Style® Stainless	26 <sup>5</sup> <sub>16</sub>	66.9	—	—
	Euro-Style (color-coordinating)	25 <sup>5</sup> <sub>16</sub>	64.3	25 <sup>5</sup> <sub>16</sub>	64.3
M	Depth with door fully open	45 <sup>3</sup> <sub>8</sub>	115.3	45 <sup>3</sup> <sub>8</sub>	115.3

OPENING/CLEARANCE DIMENSIONS					
N	Width of cabinet (min.)	30	76.2	27	68.6
O	Width of cutout	28½	72.4	25½	64.8
P*	Height of cutout (recommended)	28	71.2	28	71.2
Q	Top of cutout to bottom of upper cabinet door (min.)	2⅜	5.5	2⅜	5.5
R	Bottom of cutout to top of lower cabinet door (min.)	1½	3.8	1½	3.8
S	Bottom of cutout to floor	32	81.3	32	81.3
T	Depth of cutout (min.)	24	61.0	24	61.0
U	Bottom of countertop to bottom of cutout (min.)	30⅜	76.7	31⅞	80.5
V	Top of cutout to underside of countertop (min.)	1½	3.8	2⅝	6.7
W	Bottom of cutout to floor (min.)	4⅝	11.0	3⅞	9.8
e	Recommended junction box location				

\*Will fit cutout height from 26<sup>1</sup>/<sub>16</sub>" (68.4 cm) to 29<sup>7</sup>/<sub>16</sub>" (74.8 cm).